



Two Ankeng LRT trams, on the line's grassed track through the valley.

SKRÄLLINGE [HTTPS://COMMONS.WIKIMEDIA.ORG/WIKI/FILE:ANKENG_LIGHT_RAIL.JPG] • CC BY-SA 4.0 [HTTP S://CREATIVECOMMONS.ORG/LICENSES/BY-SA/4.0] • WIKIMEDIA COMMONS

[← Back to the previous page](#)

Ankeng LRT

The second New Taipei light rail line — a valley feeder into the Xindian corridor, with a button you have to press to get the doors to open.

THE LINE

 K01 Shuangcheng	 K06 Ankang
 K02 Rose China Town	 K07 Sunshine Sports Park
 K03 Taipei Xiaocheng	 K08 Xinhe Elementary School
 K04 Cardinal Tien Hospital An Kang Branch	 K09 Shisizhang
 K05 Jinwen University of Science and Technology	
 END OF LINE	

✦ NOT ESTABLISHED

7.5 km ^[1]

OPERATING LENGTH, K01 TO K09

Also published as 7.1 km (TDX's own station-to-station chainage) and 7.67 km (zh.wikipedia's total, measured from Ankeng Depot rather than from K01). Three figures, three different starting points — see "How long the line is" below.

K ANKENG LRT LINE 安坑輕軌			
LINE CODE K ^[1]	OPERATOR New Taipei Metro Corporation [/rail/operators/ntmc/] (NTMC [/rail/operators/ntmc/]) ^[1]	TERMINI K01 — K09 ^[22]	STATIONS 9 ^[22]
ELEVATED STATIONS 5 (K02, K06 — K09) ^[4]	AT-GRADE STATIONS 4 (K01, K03 — K05) ^[4]	OPENED 10 February 2023 ^[2]	FREE TRIAL 10 Feb – 12 Mar 2023 ^[2]
OPERATING HOURS 06:00–24:00 ^[3]	INTERCHANGE K09 with the Circular Line [/rail/metro/lines/circular-line/] ^[3]	DEPOT Ankeng Depot 安坑機廠 ^[18]	ROLLING STOCK BUILDER Taiwan Rolling Stock Company, with Voith Engineering Services ^[12]
FLEET 15 trainsets ^[12]			

The Ankeng light rail is a nine-station feeder through the hills and valley of Xindian [\[/rail/metro/stations/g01/\]](#), meeting the Circular Line [\[/rail/metro/lines/circular-line/\]](#) at K09 Shisizhang rather than entering central Taipei [\[/rail/thsr/stations/taipei/\]](#) itself.^{[4] [22]} It opened on 10 February 2023 and is operated by New Taipei Metro [\[/rail/operators/ntmc/\]](#).^[2] The doors do not open automatically: riders press the illuminated button to board or alight at every stop.^[11]



Anxin Bridge, near the Ankeng LRT's route.

TZE CHIANG HAO, CC BY 4.0, WIKIMEDIA COMMONS

Overview

The line begins beside Ankeng Depot at the junction of Antai and Anyi roads, runs north along Anyi Road through the valley, turns onto the Anhe branch road and Anhe Road, then crosses National Freeway 3, the Zhong-An Bridge approach, the New Taipei Expressway and the Xindian River before reaching Shisizhang.^[4] DORTS describes the built railway as a mixed at-grade and elevated system; the passenger service covers about 7.5 km between **K01** and **K09**.^[4] ^[1]

The project gave the Ankeng district a direct rail interchange with the wider Taipei network at Shisizhang.^[4] Its alignment required very different civil works within one short line: street-level track, viaduct, a depot lead through Shuang'an Tunnel, vibration-isolated track beside housing, and the long An-Xin Bridge over the Xindian River.^[17] ^[6] ^[14]

Route and alignment

From the depot, the alignment reaches **K01** Shuangcheng [\[/rail/metro/stations/k01/\]](/rail/metro/stations/k01/) near the Antai Road–Anyi Road junction. **K02** Rose China Town [\[/rail/metro/stations/k02/\]](/rail/metro/stations/k02/) stands on viaduct, while **K03** Taiping Temple, **K04** Cardinal Tien Hospital Ankang [\[/rail/metro/stations/k06/\]](/rail/metro/stations/k06/) Branch and **K05** Jingwen University of Science and Technology form the at-grade middle of

the valley route.^{[4] [10]} The railway rises again for **K06** Ankang and remains elevated through **K07** Yangguang Sports Park and **K08** Xinhe Elementary School [/rail/metro/stations/k08/] to **K09** Shisizhang.^[4]

The final approach turns east near the Water Resources Agency's Xindian office, then north on a new road before the railway crosses the expressway and river on An-Xin Bridge.^[4] **K09** stands in the Shisizhang redevelopment area, where the light rail terminates beside Circular Line station **Y08**.^{[4] [3]}

Planning and approvals

The Executive Yuan approved feasibility on 1 July 2013.^[4] New Taipei then began comprehensive planning that June, held public hearings on 27 and 30 December, and sent the plan to the Ministry of Transportation and Communications on 7 May 2014.^[4] After ministry reviews in September and November 2014 and National Development Council review on 18 May 2015, the Executive Yuan approved the comprehensive plan on 8 June 2015.^[4]

Environmental review had a longer history. The original environmental-impact statement was placed on record on 14 October 2003; later difference analyses covered design changes in 2016 and changes to depot layout and earthworks in 2020.^[4] The urban-plan changes for the route took effect on 24 January 2018, followed by a separate change affecting the river zone on 18 November 2019.^[4]

Construction history

The civil and track design-build contract was awarded on 3 March 2016, and main construction began on 6 April.^[4] An official project-management paper identifies Sinotech Engineering Consultants as the project and construction manager and MOH and Associates as supervising consultant; its figures show both the government and consultant site teams expanding as the work moved from civil construction into railway systems.^[9]

Testing and commissioning closed the gap between construction and public service. Stability testing was complete on 7 November 2022, initial inspection followed on 11 December, and the project team reported its corrective work complete on 27 December.^{[4] [5]} The Ministry of Transportation and Communications conducted final inspection on 14 January 2023 and issued the operating permit on 2 February; public service began eight days later.^{[5] [2]}

New Taipei's opening account says labour shortages, material shortages and the COVID-19 pandemic disrupted delivery.^[5] Those statements describe the builder's account of the schedule pressure; the cited page does not quantify a separate delay attributable to each cause.

Engineering

Track, tunnel and vibration control

Shuang'an Tunnel lies between [K01](#) and Ankeng Depot, on the depot lead rather than between two passenger stations. ^[17] DORTS describes it as Taiwan's first combined road-and-light-rail tunnel: road bores flank the light rail bore, and the tracks contain a crossover at grade inside the tunnel so trains can change direction during depot movements. ^[17]

Near [K07](#) and [K08](#), homes beside the railway made vibration and secondary noise a design concern. ^[6] DORTS records three floating-slab track installations totalling 800 m across both running directions: two sections around [K08](#) total 300 m each, and the section beside the Anhe fire brigade totals 200 m. ^[6] Elastic pads separate the heavy track slab from the bridge deck or structural invert, lowering the system's natural frequency and reducing vibration transferred into the supporting structure. ^[6]

An-Xin Bridge

Between [K08](#) and [K09](#), An-Xin Bridge crosses a roughly 400 m-wide reach of the Xindian River. ^[14] Flood-management requirements limited the crossing to two river piers, leading to a 502 m, three-span structure with a 225 m main span. ^[7] Its structural system combines an asymmetric cable-stayed bridge with a steel truss; the 130 m pylon and water-bird-wing profile form the line's most conspicuous landmark. ^[14] ^[7]

Wind was a specific design load. DORTS says the bridge was checked for wind speeds up to 80 m/s—above the 61.2 m/s threshold it gives for Beaufort force 17—and tested with a 1:60 wind-tunnel model. ^[7] The same source explains the name 安心 as a pairing of 安坑 and 新店 as well as a promise of reassurance. ^[7]

The bridge's design-build team used building-information modelling from detailed design through construction. ^[8] The official technical paper describes collision checks between structural elements, coordinated shop and construction drawings, drone-derived three-dimensional terrain for the [K08](#)–[K09](#) area, simulations of the bridge coating colours, and model-based quantity calculations. ^[8] Its handover table also includes models, records and manuals intended for the operating stage, making the model a project record rather than only a presentation image. ^[8]

The bridge's record claim varies by source. DORTS calls its 225 m main span the longest span in a Taiwanese rail transport system; its comparison gives 120.7 m for Danhai's Blue Sea Bridge and about 96 m for Kaohsiung's Love River Bridge. ^[15] CNA instead quotes a named Sinyi Construction Development project director calling the whole 502 m structure Taiwan's longest rail bridge and reports a pylon weight of about 3,450 tonnes. ^[16] These are different superlatives—span and total bridge—and remain attributed to the sources that make them.

Stations and interchange

Nine stations carry codes **K01** to **K09**.^[22] Five are elevated—**K02** and **K06** through **K09**—and four are at grade—**K01** and **K03** through **K05**—according to the route description and DORTS's **K02** station record.^[4]^[10] At **K09**, riders may board from either side platform before transferring to the Circular Line.^[11]^[3]

K04's full official name is 耕莘安康院區 `[/rail/metro/stations/k04/]`, Cardinal Tien Hospital Ankang Branch. New Taipei's station-naming panel settled on that form in December 2017, and it appears consistently in NTMC's station page, its full station list and the TDX station record.^[23]^[21]^[22]^[1]



K04 Cardinal Tien Hospital Ankang Branch station.
S8321414, CC BY-SA 4.0, WIKIMEDIA COMMONS

Route-length records

Three figures circulate for this line's length, and they are not simple duplicates of each other.

FIGURE	WHAT IT MEASURES	SOURCE
7.5 km	NTMC's own published length, matching TDX's <code>RouteLength</code> field for route K-1 exactly	NTMC ^[2] , TDX ^[1]

FIGURE	WHAT IT MEASURES	SOURCE
7.1 km	TDX's own station-to-station chainage, K01 to K09	TDX CumulativeDistance e ^[1]
7.67 km	zh.wikipedia's total route length	zh.wikipedia ^[29]

The three published length figures use incompatible labels. TDX gives 7.5 km as RouteLength but 7.1 km as the cumulative station-to-station distance at K09. ^[1] Chinese Wikipedia labels 7.67 km as total route length and 7.5 km as operating length, while describing the route as beginning at Ankeng Depot rather than K01. ^[29] DORTS independently publishes “about 7.5 km” for the line but does not define its measurement boundary. ^[4]

Chinese Wikipedia also divides 7.5 km into 2.8 km at grade, 4.3 km elevated and 0.4 km underground including a portal. ^[29] DORTS, by contrast, describes the passenger system simply as elevated and at grade, while placing Shuang'an Tunnel between the depot and K01. ^[4] ^[17] The sources therefore do not establish whether the 0.4 km is counted within the K01–K09 passenger route or on its depot connection.

Rolling stock

Taiwan Rolling Stock Company built the fleet with Germany's Voith Engineering Services. ^[12] NTMC's fleet page groups the Danhai and Ankeng orders together: thirty trains of the design were built, fifteen allocated to each line. ^[12] Each five-car, fully low-floor train has a stated capacity of 265 passengers—62 seated and 203 standing—and a maximum speed of 70 km/h under overhead wire or 50 km/h on an unwired section. ^[12]



An Ankeng LRT tram's interior.

WCTAIWAN, CC BY 4.0, WIKIMEDIA COMMONS

The gold livery, 光耀金, was selected by a public vote.^[12] Chinese Wikipedia records the other 2018 ballot options as red-gold, purple and green, but the NTMC fleet page confirms only the winning colour.^[29] ^[12]

Depot

Ankeng Depot sits on the hillside beyond K01 and connects to the passenger line through Shuang'an Tunnel. ^[17] ^[18] DORTS divides its rail facilities into a nine-track stabling yard and a five-track maintenance shop, with the latter used for inspection, testing, maintenance and cleaning; the administration building houses train control, dispatch and staff-training functions. ^[18]

The depot's boarding platform carried two weekday morning passenger departures during a trial from July through December 2024. ^[19] The 06:28 and 07:16 trains ran toward K09, used a portable fare reader, and charged as if the rider had boarded at K01. ^[19] New Taipei said the trial was an input to evaluating whether the platform should be proposed for conversion to a normal station. ^[19]

Operations

Two service patterns run the line. The full-line service, K01 to K09, takes about 21 minutes; a short working, K06 to K09, takes about 9 minutes ^[11] ^[1]. Baseline headways were about 7.5 minutes peak on the overlapping K06–K09 section and 10–15 minutes peak on the non-overlapping K01–K05 section, both about 15 minutes off peak ^[11].

By February 2024 the line had carried 2 million cumulative passengers, averaging 5,600 a day, with growth concentrated on the non-short-working stretch between K05 Jingwen University of Science and Technology and K01 Shuangcheng ^[13]. From 26 February 2024 the peak short workings became full-line services: morning-peak headway tightened to 6–8 minutes, evening-peak to 8–10 minutes ^[13]. Off-peak sections were left unchanged. ^[13]

Fares

Fares are stepped by distance, matching Danhai LRT [\[/rail/metro/lines/danhai-lrt/\]](/rail/metro/lines/danhai-lrt/): NT\$20 base, NT\$25 maximum ^[3]. A 常客回饋金 (frequent-rider) rebate returns NT\$50 for every NT\$200 accumulated on an e-ticket, stated in NTMC's own Ankeng-specific announcement rather than only a general New Taipei light-rail scheme ^[2].

The line is covered by the TPASS 基北北桃1200 monthly pass: MOTC's programme table lists light rail among the covered modes across the four participating municipalities. ^[28] The published sales locations conflict. MOTC's 2022 sales-point table names K09 **Shisizhang** directly ^[28], but NTMC's own current page listing sales locations for the pass names only Circular Line stations and two Danhai LRT stations — no Ankeng LRT station appears on it. ^[24] The sources establish different lists at different publication dates, not whether K09 currently sells the pass.

Incidents and ridership

The line was affected by the 3 April 2024 Hualien earthquake: immediately afterward, K09–K06 ran single-track bidirectional and K06–K01 ran a partial service, before the whole line returned to normal running at 16:30 the same day, at a 15-minute headway^[25] ^[26].

NTMC's full-year release says the line carried more than 2.03 million journeys in 2025.^[27] The same release gives more than 6.01 million for Danhai LRT and 22.04 million for the Circular Line, within a New Taipei Metro total exceeding 30.09 million journeys.^[27]

Naming and place


Ankeng's old name was 暗坑 (Hokkien Àm-kheⁿ), and the district was renamed in 1801 by Lin Deng-xuan, grandson of the pioneer settler Lin Tian-cheng, because the old name meant “dark valley” and was considered inauspicious.^[20] The modern line name therefore preserves the district's later name rather than inventing a separate railway identity.

See also: Public art in the Taipei-region rail network [\[/rail/history/public-art/\]](/rail/history/public-art/) and Metro incidents and service disruptions [\[/rail/history/incidents/\]](/rail/history/incidents/).

Ridership

The operator’s published line total for 07/2026 is **341,692**. The table preserves the source’s entry and exit dimensions where they are published. NTMC’s older PDF records publish whole-system and line totals without station rows or separate entry and exit dimensions; the table leaves those cells TBC.


LATEST MONTH	PUBLISHED TOTAL	ENTRY / EXIT	
07/2026	341,692	341,948 / 341,692	

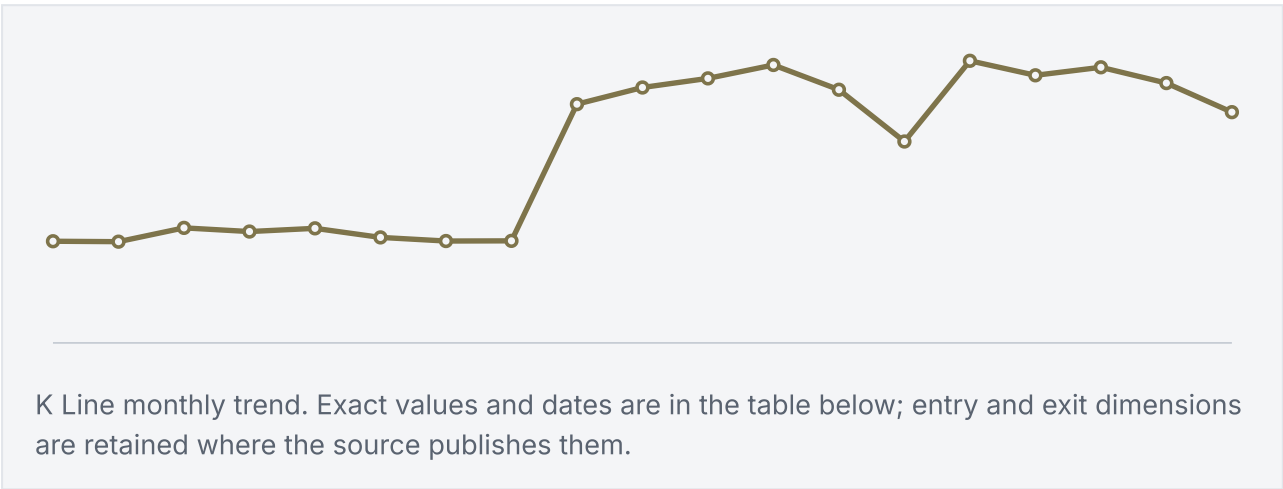

Published line ridership by month

MONTH	PUBLISHED TOTAL	ENTRY	EXIT	DAYS
01/2025	150,513	TBC	TBC	31
02/2025	149,882	TBC	TBC	28
03/2025	170,335	TBC	TBC	31
04/2025	164,879	TBC	TBC	30
05/2025	169,633	TBC	TBC	31
06/2025	156,223	TBC	TBC	30
07/2025	150,849	TBC	TBC	31
08/2025	151,112	151,101	151,112	31
09/2025	353,548	353,742	353,548	30
10/2025	378,200	378,548	378,200	31
11/2025	391,724	391,808	391,724	30
12/2025	411,580	412,338	411,580	31
01/2026	374,890	375,164	374,890	31
02/2026	298,222	298,734	298,222	28
03/2026	417,760	418,666	417,760	31
04/2026	396,256	396,198	396,256	30
05/2026	408,134	408,182	408,134	31
06/2026	384,774	385,192	384,774	30
07/2026	341,692	341,948	341,692	31

Source: Monthly whole-system passenger traffic reports [[https://www.ntmetro.com.tw/basic/?mode=download&func=basic&code=basic10145&join=10145&path=MTE15bm0N\(2Baci0WFq0ezu\(2Be1semBi\(2BmHj\(2Be1seioiF8yNjA4MjQxMTE2Mjg\(3D.ods](https://www.ntmetro.com.tw/basic/?mode=download&func=basic&code=basic10145&join=10145&path=MTE15bm0N(2Baci0WFq0ezu(2Be1semBi(2BmHj(2Be1seioiF8yNjA4MjQxMTE2Mjg(3D.ods))] · operator statistics index [<https://www.ntmetro.com.tw/basic/?node=10145>] · retrieved 2026-08-26

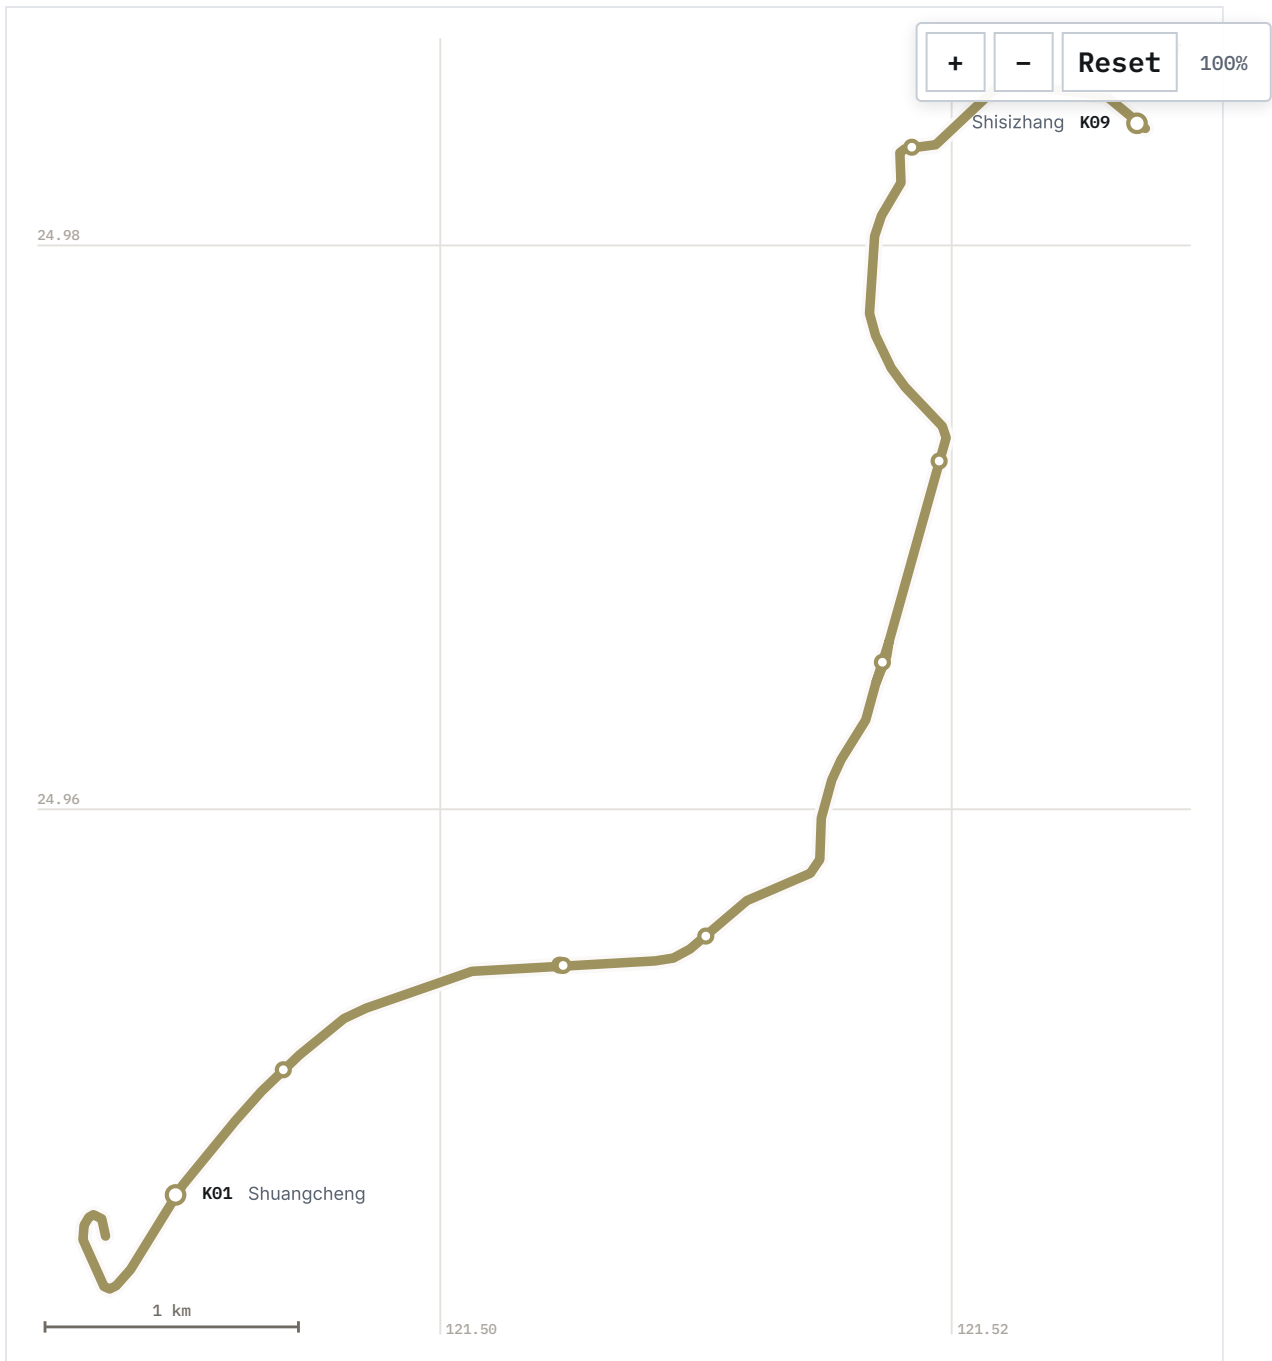

The line as surveyed, from MOTC route geometry — 5.9 km measured along the alignment from the first station to the last. Termini and interchanges are labelled; every station has a name on hover.

Specifications

Route length, operating	7.5 km ^[1]
Route length, station chainage	7.1 km ^[1]
Route length, published total	7.67 km ^[29]
Stations	9 ^[22]
Full-line journey	21 min ^[11]
Short-working journey	9 min ^[11]
Peak headway, overlap (K06–K09)	7.5 min ^[11]
Peak headway, non-overlap (K01–K05)	10–15 min ^[11]
Off-peak headway	15 min ^[11]
Base fare	20 NT\$ ^[3]
Maximum fare	25 NT\$ ^[3]
Cars per train	5 ^[12]
Capacity per train	265 ^[12]
Maximum speed	70 (wired) / 50 (unwired) km/h ^[12]

References

26 of 29 sources on this page are primary — published by the operator, the builder or government.

- Taiwan MOTC TDX — Line, Station, StationOfRoute, operator NTALRT** [https://tdx.transportdata.tw/]

PRIMARY Ministry of Transportation and Communications, Taiwan accessed 2026-08-12

archived [https://web.archive.org/web/20260806042022/https://tdx.transportdata.tw/]

Government open data, committed to this repository at data/tdx/NTALRT/. RouteLength for route K-1 is 7.5, matching NTMC's own published figure exactly; CumulativeDistance against the last station (K09) is 7.1. Station K04's official name, 耕莘安康院區, and the line's colour, #9E925E, are both read from this record.
- Ankeng LRT opens 10 February — one month free trial** [https://www.ntmetro.com.tw/basic/?mode=detail&node=544]

安坑輕軌2月10日通車 試營運期1個月享免費搭乘

PRIMARY New Taipei Metro Corporation (新北大眾捷運股份有限公司) accessed 2026-08-12

archived [https://web.archive.org/web/20260812000000/https://www.ntmetro.com.tw/basic/?mode=detail&node=544]

The operator's own opening announcement: 安坑輕軌將於2月10日正式通車...新北大眾捷運股份有限公司於當日下午1點正式發出首班車; the free trial from 2月10日 to 3月12日 for anyone tapping an e-ticket; trial hours of 上午10點至下午18點; and the 常客回饋金 rebate, 搭乘每滿200元即可回饋50元.

- 3 **Ankeng LRT opens 10 February — headways and fares at a glance** [<https://www.ntmetro.com.tw/basic/?mode=detail&node=578>]
安坑輕軌2月10日正式通車 班距票價懶人包一次看
PRIMARY New Taipei Metro Corporation (新北大眾捷運股份有限公司) accessed 2026-08-12
archived [<https://web.archive.org/web/20260812000001/https://www.ntmetro.com.tw/basic/?mode=detail&node=578>]
The operator's fare and hours summary: 票價比照淡海輕軌採階梯費率制，一段票價為20元，最高25元; post-trial operating hours 6時至24時; the **K09** interchange with the Circular Line.
-

- 4 **Ankeng Line** [<https://www.dorts.ntpc.gov.tw/about/route/jw00dPGn2nbJ>]
安坑線
PRIMARY New Taipei City Government, Department of Rapid Transit Systems (新北市政府捷運工程局 , DORTS) accessed 2026-08-23
archived [<https://web.archive.org/web/20260812000002/https://www.dorts.ntpc.gov.tw/about/route/jw00dPGn2nbJ>]
The builder's full route and chronology page: the corridor and nine stations; July 2013 feasibility approval; June 2015 comprehensive-planning approval; environmental and urban-plan milestones; the 3 March 2016 civil design-build award; the 6 April 2016 start; inspections and the 2 February 2023 operating approval.
-

- 5 **Ankeng LRT receives operating permit and opens 10 February** [<https://www.ntpc.gov.tw/ch/home.jsp?dataserno=471c4aec1fe681460bc91c9f77f27a4&id=e8ca970cde5c00e1>]
安坑輕軌獲營運許可 2月10日通車
PRIMARY New Taipei City Government (新北市政府) accessed 2026-08-23
The commissioning sequence: initial inspection on 11 December 2022, completion of improvements and submission for final inspection on 27 December, final inspection on 14 January 2023, and MOTC operating approval on 2 February. Also records construction disruption from labour and material shortages and the pandemic.
-

- 6 **Floating-slab track reduces noise and vibration on Ankeng LRT** [<https://www.dorts.ntpc.gov.tw/documentary/articleInfo/WQR2W0l0dGPV>]
安坑輕軌浮動式道床降低噪音振動
PRIMARY New Taipei City Government, Department of Rapid Transit Systems (新北市政府捷運工程局 , DORTS) accessed 2026-08-23
Three floating-slab-track locations total 800 m over both directions: 300 m around **K08** on each approach combined and 200 m beside the Anhe fire brigade, selected near vibration-sensitive housing around **K07** and **K08**. Explains the elastic-pad isolation mechanism.
-

- 7 **An-Xin Bridge — a New Taipei landmark built to resist severe winds** [<https://www.dorts.ntpc.gov.tw/documentary/articleInfo/1A1dpK1v2LK7>]
安心橋—耐強風的新北地標
PRIMARY New Taipei City Government, Department of Rapid Transit Systems (新北市政府捷運工程局 , DORTS) accessed 2026-08-23

Water-agency flood requirements limited the river crossing to two piers; the resulting 502 m, three-span hybrid cable-stayed and steel-truss bridge has a 225 m main span. Records 80 m/s wind design and 1:60 wind-tunnel modelling.

-
- 8 **Practical study of BIM in the design and construction of An-Xin Bridge for the Ankeng LRT system** [<https://www.dorts.ntpc.gov.tw/admin/content/upload/file/20211117/e24abaa-b-d892-4a63-b31a-dc61c6915f87.pdf>]
建築資訊模型(BIM)於安坑輕軌系統安心橋設計施工應用實務探討
PRIMARY New Taipei City Government, Department of Rapid Transit Systems (新北市府捷運工程局 , DORTS) accessed 2026-08-23
Full eight-page technical paper, downloaded and rendered for verification. Documents BIM clash checking, bridge-member coordination, drone-derived 3D GIS, coating-colour simulation, quantity calculation and model handover across design, construction and operations.
-
- 9 **Gender analysis of construction-management staff in the joint site office — Ankeng LRT case study** [<https://www.dorts.ntpc.gov.tw/cdn/file/20211025/2835d99f-85e8-4a32-8106-f8ce91b8bf2c.pdf>]
工地聯合辦公室施工管理人員之性別探討及策進作為—以安坑輕軌為例
PRIMARY New Taipei City Government, Department of Rapid Transit Systems (新北市府捷運工程局 , DORTS) accessed 2026-08-23
Full ten-page official paper. Identifies Sinotech Engineering Consultants as project/construction manager and MOH and Associates as supervising consultant, and records how those teams expanded as systems work grew.
-
- 10 **Ankeng LRT Rose China Town station** [https://www.dorts.ntpc.gov.tw/art_aesthetics/public_artinfo/Pxe2kNxkmEgL]
安坑輕軌玫瑰中國城站
PRIMARY New Taipei City Government, Department of Rapid Transit Systems (DORTS) accessed 2026-08-12
Confirms **K02** is elevated, ahead of the route's general at-grade-to-elevated transition point: 玫瑰中國城站位於...安一路高架橋上.
-
- 11 **Ankeng LRT operating pattern** [<https://www.dorts.ntpc.gov.tw/documentary/articleInfo/06Jma074Zqya>]
安坑輕軌營運模式
PRIMARY New Taipei City Government, Department of Rapid Transit Systems (DORTS) accessed 2026-08-12
archived [<https://web.archive.org/web/20260812000003/https://www.dorts.ntpc.gov.tw/documentary/articleInfo/06Jma074Zqya>]
The two service patterns and their times (全程車...約21分鐘; 區間車...約9分鐘), the baseline headways, the door-open button (上下車也要注意按下車門按鈕列車門才會打開), and the note that both **K09** side platforms can be boarded (2側月台皆可搭乘).
-
- 12 **Light rail rolling stock** [<https://www.ntmetro.com.tw/basic/?mode=detail&node=19>]
輕軌列車
PRIMARY New Taipei Metro Corporation (新北大眾捷運股份有限公司) accessed 2026-08-12
archived [<https://web.archive.org/web/20260812000004/https://www.ntmetro.com.tw/basic/?mode=detail&node=19>]

The operator's own rolling-stock page, covering both New Taipei light rail lines together: builder 台灣車輛股份有限公司 with Germany's Voith Engineering Services; 30 trains total, 15 to Danhai and 15 to Ankeng; 5 cars per train, 265 capacity (62 seated, 203 standing); 70 km/h under wire, 50 km/h off wire; livery 光耀金 chosen by public vote.

-
- 13** Ankeng LRT commuter ridership growing steadily — peak short-working converted to full-line running, headway to 6 minutes [<https://www.ntmetro.com.tw/basic/?mode=detail&node=712>]

安坑輕軌通勤運量穩定增長 尖峰時段區間車將改為全線行駛 縮短班距可達6分鐘一班

PRIMARY New Taipei Metro Corporation (新北大眾捷運股份有限公司) accessed 2026-08-12

archived [<https://web.archive.org/web/20260812000005/https://www.ntmetro.com.tw/basic/?mode=detail&node=712>]

20 February 2024 release: cumulative ridership at one year, 200萬人次, daily average 5,600; growth concentrated **K05**—**K01**; from 26 February 2024 the peak short-workings became full-line, with headway tightened to 6–8 minutes (morning peak) and 8–10 minutes (evening peak) — not a single '6-minute' figure.

-
- 14** The Ankeng LRT's hardest engineering work — An-Xin Bridge [<https://www.dorts.ntpc.gov.tw/documentary/articleInfo/oa1ZKpQXmB9V>]

安坑輕軌最困難的工程—安心橋

PRIMARY New Taipei City Government, Department of Rapid Transit Systems (DORTS)

accessed 2026-08-12

archived [<https://web.archive.org/web/20260812000006/https://www.dorts.ntpc.gov.tw/documentary/articleInfo/oa1ZKpQXmB9V>]

502 m, three-span continuous asymmetric cable-stayed bridge, 130 m pylon, crossing a 400 m-wide reach of the Xindian River: 全長502公尺的安心橋，採三跨連續不對稱斜張橋設計...塔高130公尺。

Called 安坑輕軌難度最高的工程, the line's hardest engineering work — not itself a length superlative.

-
- 15** Taiwan's distinctive light rail bridges — Danhai's Blue Sea Bridge, Ankeng's An-Xin Bridge, Kaohsiung's Love River Bridge [<https://www.dorts.ntpc.gov.tw/documentary/articleInfo/r6421Qxv29nR>]

臺灣輕軌特色橋梁 —— 淡海藍海橋 · 安坑安心橋 · 高雄愛河橋

PRIMARY New Taipei City Government, Department of Rapid Transit Systems (DORTS)

accessed 2026-08-12

DORTS's own superlative for An-Xin Bridge is about span, not overall length: 臺灣首座單塔斜張橋型軌道複合式橋梁，最大跨度達225公尺，為目前國內鐵路運輸系統中最長跨度。 Gives comparison lengths for Danhai's Blue Sea Bridge (120.7 m) and Kaohsiung's Love River Bridge (about 96 m).

-
- 16** Ankeng LRT (2/2): the 502-metre An-Xin Bridge — Ankeng LRT crosses the Xindian River to meet the Circular Line [<https://www.cna.com.tw/news/alo/202109250028.aspx>]

安坑輕軌2／502公尺安心橋 安坑輕軌跨新店溪銜接環狀線

SECONDARY 中央社 (Central News Agency, CNA) accessed 2026-08-12

Reports a pylon weight of about 3,450 tonnes and quotes 方一昇, a Sinyi Construction Development project director, calling the bridge 目前國內最長軌道橋 — Taiwan's longest rail bridge outright, a broader claim than DORTS's own 'longest span' framing above.

-
- 17** A new highlight on the Ankeng LRT's track — the Shuang'an Tunnel's crossover [<https://www.dorts.ntpc.gov.tw/documentary/articleInfo/pRG21D792b5z>]

安坑輕軌軌道新亮點！雙安隧道交叉橫渡線！

PRIMARY New Taipei City Government, Department of Rapid Transit Systems (DORTS)
accessed 2026-08-12

Places the 雙安隧道 (Shuang'an Tunnel) — described as Taiwan's first road-and-light-rail co-built tunnel — between **K01** station and Ankeng Depot, i.e. on the depot lead rather than between two passenger stations. No length given for the tunnel itself.

- 18 Getting to know Ankeng Depot [<https://www.dorts.ntpc.gov.tw/documentary/articleInfo/0V4drGe1ZqEN>]

安坑機廠知多少！

PRIMARY New Taipei City Government, Department of Rapid Transit Systems (DORTS)
accessed 2026-08-12

Three functional areas: a 9-track stabling yard (駐車廠), a 5-track maintenance shop (維修廠), and an administration building for train control, dispatch and staff training.

- 19 Ankeng LRT depot trial well used — extended again to end of December [<https://www.ntpc.gov.tw/ch/home.jsp?id=28&dataserno=202408300041>]

安坑輕軌機廠試辦搭乘踴躍 再延長至12月底

PRIMARY New Taipei City Government (新北市政府) accessed 2026-08-12

Confirms the depot boarding-platform trial's final extension to 31 December 2024, with roughly 50 riders a day across the two peak trips, run as an evaluation of whether the platform should become a full station: 長期持續觀察在地民眾搭乘輕軌成效.

- 20 Why is it called the "Ankeng" LRT? [<https://www.dorts.ntpc.gov.tw/documentary/articleInfo/vKR2L3J9mJGp>]

為什麼叫做「安坑」輕軌呢？

PRIMARY New Taipei City Government, Department of Rapid Transit Systems (DORTS)
accessed 2026-08-12

Ankeng's old name was 暗坑 (Hokkien Àm-kheⁿ, 'dark valley'); renamed 安坑 in 1801 by Lin Deng-xuan (林登炫), grandson of pioneer settler Lin Tian-cheng (林天成), because the old name sounded unpleasant.

- 21 **K04** Cardinal Tien Hospital Ankang Branch station [<https://www.ntmetro.com.tw/basic/?mode=detail&node=607>]

K04耕莘安康院區

PRIMARY New Taipei Metro Corporation (新北大眾捷運股份有限公司) accessed 2026-08-12

The operator's own station page, titled and located as 耕莘安康院區, 安一路與車子路路口 — confirming the station's official name is the hospital's branch campus name, not the shorter 耕莘醫院 found in some secondary round-ups.

- 22 Ankeng LRT stations [<https://www.ntmetro.com.tw/basic/?node=10137>]

安坑輕軌車站

PRIMARY New Taipei Metro Corporation (新北大眾捷運股份有限公司) accessed 2026-08-12

The full nine-station list, **K01** — **K09**, matching TDX exactly.

- 23 Ankeng LRT station names announced, completion expected end of 2021 [<https://news.1tn.com.tw/news/local/paper/1158040>]

安坑輕軌站名出爐 預計110年底完工

SECONDARY 自由時報 (Liberty Times) accessed 2026-08-12

Contemporaneous, 7 December 2017, report of the city's own station-naming panel finalising K4 as 耕莘安康院區, years before opening, and describing the naming process (district office consultation with local wardens, historians and elected representatives, decided by 捷運車站命名、更名或名稱加註評審小組).

24 Where to buy the TPASS (Taipei–New Taipei–Keelung–Taoyuan) commuter pass on New Taipei Metro [https://www.ntmetro.com.tw/basic/?mode=detail&node=659]

「TPASS行政院通勤月票(基北北桃)」悠遊卡在新北捷運哪裡可以購卡？

PRIMARY New Taipei Metro Corporation (新北大眾捷運股份有限公司) accessed 2026-08-12

Lists Circular Line stations and two Danhai LRT stations (**V01**, **V26**) as sales points; no Ankeng LRT station, including **K09**, is listed. Cited here for what it does not say, against secondary claims that **K09** sells the pass.

25 New Taipei Metro — 3 April earthquake update [https://www.ntmetro.com.tw/basic/?mode=detail&node=716]

新北捷運公司 - 0403 地震說明

PRIMARY New Taipei Metro Corporation (新北大眾捷運股份有限公司) accessed 2026-08-12

Immediately after the 3 April 2024 earthquake: 安坑輕軌K9至K6以單線雙向營運，K6至K1局部營運。

26 New Taipei Metro's two light rail lines resume normal operation [https://www.ntmetro.com.tw/basic/?mode=detail&node=719]

新北捷運兩線輕軌恢復正常營運

PRIMARY New Taipei Metro Corporation (新北大眾捷運股份有限公司) accessed 2026-08-12

Ankeng LRT resumed normal operation at 16:30 on 3 April 2024, at a 15-minute headway: 安坑輕軌已於16:30恢復正常營運，班距為15分鐘。

27 New Taipei Metro exceeds 30 million journeys in 2025, a record high [https://www.ntmetro.com.tw/basic/?mode=detail&node=843]

新北捷運2025全年運量突破3,000萬人次！創歷史新高

PRIMARY New Taipei Metro Corporation (新北大眾捷運股份有限公司) accessed 2026-08-23

The operator's full-year release says Ankeng LRT exceeded 2.03 million journeys in 2025; New Taipei Metro's three operated lines together exceeded 30.09 million.

28 Table 1: contents and purchase channels of the Taipei–New Taipei–Keelung–Taoyuan living-circle commuter monthly pass [https://motc.gov.tw/ch/app/data/doc?aplistdn=&detailNo=1116207557921214464&id=14&module=news&preview=&serno=1efdb7ab-010b-4e10-ba6c-326d8cfea18f&type=s]

表1、基北北桃生活圈通勤月票方案內容及購買通路

PRIMARY 中華民國交通部 (Ministry of Transportation and Communications, Taiwan)

accessed 2026-08-13

Table attached to the Ministry's own 2022 TPASS launch press release. 適用運具 (covered modes): 捷運、輕軌、臺鐵、市區客運、公路客運(含國道客運)、公共自行車 — metro, light rail, rail, city and intercity bus, and public bicycle generally, naming no specific light rail line. Its own sales-point list, by contrast, names **安坑輕軌 **K09** 十四張站** directly, alongside Taipei Metro, Circular Line and

Danhai LRT V01 / V26 — conflicting with NTMC's own current sales-point page below, which lists no Ankeng LRT station at all. Not re-verified against a more recent MOTC document; may reflect 2022 launch-day provision rather than the pass's current state.

29 Ankeng LRT [<https://zh.wikipedia.org/zh-tw/安坑輕軌>]

安坑輕軌

SECONDARY 維基百科 (Chinese Wikipedia) accessed 2026-08-12

Infobox distinguishes 路線長度 7.67公里 from 營運長度 7.5公里 (the latter matching NTMC/TDX exactly), and its route sentence gives the reason: the line is described as starting 起自安坑機廠 (at the depot), not at K01. Also the source for the 2.8+4.3+0.4 km structure breakdown, the 2018 four-option livery vote shortlist, and the July–December 2024 depot trial dates.

Last updated: 2026-08-23

An independent, non-commercial reference site. Not affiliated with Taipei Rapid Transit Corporation, Taipei City Government, or any bus operator. Line colours are the official values published by each operator through Taiwan MOTC's open data platform. [About this site.](#)

Station names, codes and sequence from TDX Transport Data eXchange, Ministry of Transportation and Communications, operators TRTC, NTMC, TYMC, and TMRT. Government open data. Retrieved 2026-08-22; source last updated 2016-11-23. The 12 Sanying station records absent from TDX are sourced directly to New Taipei Metro and government publications on their pages. Provenance.