
[← Back to the previous page](#)

K01

Shuangcheng

雙城

Stop 1 of 9^[1] · Xindian District (新店區)^[1] · underground^[4]




POSITION 1 of 9 ^[1]	INTERCHANGE TBC	DISTRICT Xindian District (新店區) ^[1]	STRUCTURE Underground ^[4]
FACILITIES NTMC publishes a passenger enquiry point with wheelchair availability and an accessible ticket machine at all light-rail stations. K01 / K03 – K05 use the operator's at-grade ramp provision; K02 / K06 – K09 use the operator's elevated-station lift provision. Station-specific lift/ramp count: TBC. Bike parking: TBC. Toilet: none; NTMC says only K09 has a light-rail station toilet. ^[7]	EXIT LOCATIONS Number, street-emergence positions and station-specific accessible entry points: TBC. ^[1]	PLATFORMS AND TRACKS At-grade; platform form and track count: TBC. NTMC describes the light-rail system as open platforms with card readers rather than closed gates. ^[5]	DEPOT SERVING THIS STRETCH Ankeng Depot; station-level operating roster allocation: TBC. ^[8]
PUBLIC ART TBC	STATION NAMING Current operator name is established; original/construction-era name, dated renames and the announcement that made any change: TBC. ^[1]	ENGINEERING HISTORY DORTS places the three-bore Shuang'an Tunnel and its track crossover on the section between K01 and Ankeng Depot. This is the depot lead, not a tunnel between two passenger stations. ^[6]	ADJACENT LANDMARKS Anyi Road and Tiantianmi Community are named in the operator and builder station-position descriptions. ^[2]
OPENED 10 February 2023 ^[4]	OPERATOR New Taipei Metro Corporation [/rail/operators/ntmc/] ^[1]		

Location

ADDRESS	TBC ^[1]
STATION LOCATION	安一路上，鄰近甜蜜蜜社區 ^[2]
COORDINATES	24.946321, 121.489645

DORTS records the Ankeng civil turnkey award on 3 March 2016, the main works start on 6 April 2016, and a line-wide budget of NT\$16.632 billion.^[4] The route project record describes the depot at the Antai and Anyi roads, then the first five passenger stations following Anyi Road before the alignment turns onto elevated Anhe Road at **K06**.^[4] A separate builder engineering record places the three-bore Shuang'an Tunnel and its light-rail track crossover in the section between **K01** and Ankeng Depot.^[6] That tunnel record distinguishes the depot lead from a tunnel between passenger stations, making the underground work part of the operating approach rather than a buried **K01**–**K02** segment.^[6] In February 2021, DORTS reported track laying at **K01** and **K02** on what its progress article calls the at-grade section, with depot track work scheduled next.^[10] The same progress record describes the 2.6-hectare depot as a deliberately small facility divided into stabling, maintenance and administration areas.^[10] By the end of 2021, the depot and **K01**–**K05** systems had been energised so trains could begin on-line testing, according to the builder's January 2022 progress report.^[12] An earlier October 2021 milestone recorded the first train entering the depot, completed at-grade civil and track work, and continuing elevated track and electromechanical work.^[14] That milestone set out static, dynamic and endurance tests as the next sequence, connecting the physical completion of the **K01** approach with the later systems-validation programme.^[14] The power-system design takes 161 kV from Taipower supply points into the **K05** and **K09** utility rooms, steps it down to 22.8 kV, and distributes it to the line's traction substations.^[13] Those substations rectify the traction supply to 750 V direct current for the trains, although the technical article does not assign a separate traction substation to **K01** itself.^[13] The builder later identified China Steel as electromechanical turnkey contractor, China Engineering Consultants as project manager, and Sinotech Engineering Consultants as supervision consultant.^[16] The electromechanical project received New Taipei's Public Construction Golden Quality Award in December 2023, with the award article also noting a 42 percent vehicle-domestication ratio.^[16] DORTS presents the route as a connection for the Anyi and Anhe communities and estimates that the project can shorten relevant trips by roughly 15 to 20 minutes.^[4]

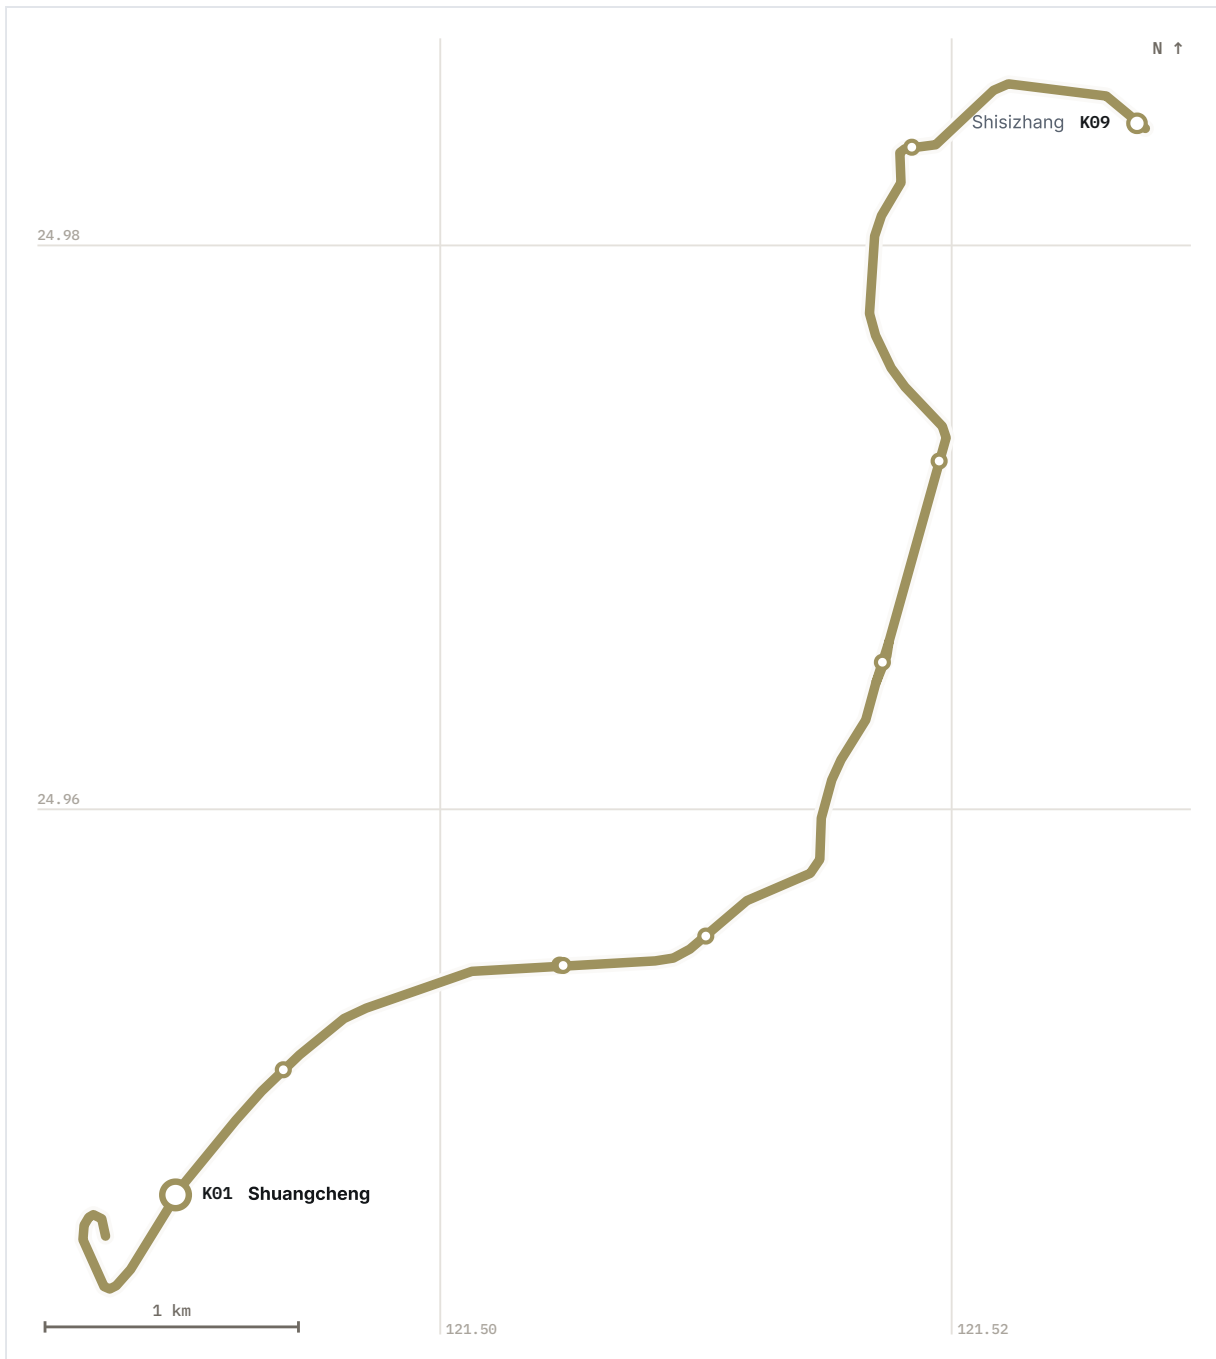

K01 on the Ankeng LRT Line. Drawn from MOTC route geometry.

References

18 of 18 sources on this page are primary — published by the operator, the builder or government.

- 1 Ankeng LRT **K01** station page [<https://www.ntmetro.com.tw/basic/?mode=detail&node=600>]
安坑輕軌K01車站
PRIMARY New Taipei Metro Corporation (新北大眾捷運股份有限公司) accessed 2026-08-14

The operator's full station page identifies the station and publishes its timetable record; the readable HTML links to a station-information document rather than stating a station-specific platform or exit table.

2 Ankeng LRT station list [<https://www.ntmetro.com.tw/basic/?node=10137>]

安坑輕軌車站

PRIMARY New Taipei Metro Corporation (新北大眾捷運股份有限公司) accessed 2026-08-14

The operator's full station table publishes **K01**–**K09** codes, current names and station-position descriptions; it does not provide postal street addresses for the eight TDX address gaps.

3 Taiwan MOTC TDX — Ankeng LRT station records [<https://tdx.transportdata.tw/>]

TDX 安坑輕軌車站資料

PRIMARY Ministry of Transportation and Communications, Taiwan (交通部) accessed 2026-08-14

The committed TDX records publish station sequence, current names, the **K09** postal address, districts, coordinates and running data used by the generated registry.

4 Ankeng Line project record [<https://www.dorts.ntpc.gov.tw/about/route/jW00dPGn2nbJ>]

安坑線

PRIMARY New Taipei City Department of Rapid Transit Systems (新北市政府捷運工程局)

accessed 2026-08-14

The builder's full route page publishes the 7.5 km length, nine stations, 10 February 2023 opening, route milestones, the at-grade Anyi Road section, the elevated Anhe Road section and the route's named station surroundings.

5 New Taipei Metro light-rail frequently asked questions [<https://www.ntmetro.com.tw/basic/?node=10005>]

常見問題

PRIMARY New Taipei Metro Corporation (新北大眾捷運股份有限公司) accessed 2026-08-14

The operator's full FAQ states that **K09** has male/female and accessible toilets while the other light-rail stations do not, that **K09** transfers with the Circular Line, that light rail uses open platforms and card readers, and that doors are opened by passenger buttons.

6 Shuang'an Tunnel track crossover [<https://www.dorts.ntpc.gov.tw/documentary/articleInfo/pRG21D792b5z>]

安坑輕軌軌道新亮點！雙安隧道交叉橫渡線！

PRIMARY New Taipei City Department of Rapid Transit Systems (新北市政府捷運工程局)

accessed 2026-08-14

The builder's full engineering article places the three-bore Shuang'an Tunnel between **K01** and Ankeng Depot and describes its light-rail track crossover.

7 New Taipei Metro light-rail accessibility services [<https://www.ntmetro.com.tw/basic/?node=10041>]

無障礙服務

PRIMARY New Taipei Metro Corporation (新北大眾捷運股份有限公司) accessed 2026-08-14

The operator's full accessibility page publishes enquiry points, accessible ticket machines, lifts at elevated stations, ramps at at-grade stations, and **K09** nursing-room and accessible-toilet information.

- 8 Ankeng Depot engineering record [<https://www.dorts.ntpc.gov.tw/documentary/articleInfo/0V4drGe1ZqEN>]
安坑機廠知多少！
PRIMARY New Taipei City Department of Rapid Transit Systems (新北市政府捷運工程局)
accessed 2026-08-14
The builder's full depot article publishes the nine-track stabling yard, five-track maintenance shop and administration building functions; a station-by-station operating roster is not published.
-
- 9 Rose China Town station architecture [<https://www.dorts.ntpc.gov.tw/documentary/articleInfo/pW0dxgR923Ex?page=188>]
安坑輕軌玫瑰中國城站設計搶先看
PRIMARY New Taipei City Department of Rapid Transit Systems (新北市政府捷運工程局)
accessed 2026-08-18
The builder's full June 2021 station-design article describes **K02** as an island-platform station on the Anyi Road elevated bridge, with a forest-in-the-trees design concept and an orange dotted-glass roof.
-
- 10 Ankeng **K01**—**K02** track-laying progress [<https://www.dorts.ntpc.gov.tw/documentary/articleInfo/MJjdJV4wdAv6?page=230>]
侯市長視察安坑輕軌工程！
PRIMARY New Taipei City Department of Rapid Transit Systems (新北市政府捷運工程局)
accessed 2026-08-18
The builder's full February 2021 progress article records track laying at **K01** and **K02** on the at-grade section and describes the 2.6-hectare depot layout and construction sequence.
-
- 11 Ankeng **K06** turnback and station-platform design [<https://www.dorts.ntpc.gov.tw/documentary/articleInfo/06Jmar102qya>]
安坑輕軌高架車站及機廠進度！
PRIMARY New Taipei City Department of Rapid Transit Systems (新北市政府捷運工程局)
accessed 2026-08-18
The builder's full August 2021 progress article records **K06** construction, a side-and-island-platform arrangement and six turnouts around the station allowing vehicles to turn back toward **K09**.
-
- 12 Ankeng **K01**—**K05** systems energisation [<https://www.dorts.ntpc.gov.tw/documentary/articleInfo/1Rb2b9e4mAyP>]
一月安坑沿線空拍！
PRIMARY New Taipei City Department of Rapid Transit Systems (新北市政府捷運工程局)
accessed 2026-08-18
The builder's full January 2022 progress article records the depot and **K01**—**K05** systems energised by the end of the preceding year as preparation for train-on-line testing.
-
- 13 Ankeng LRT high-voltage traction power [<https://www.dorts.ntpc.gov.tw/documentary/articleInfo/3QGZ8V7J2rb4?page=220>]
安坑輕軌機電系統高壓供電知多少！
PRIMARY New Taipei City Department of Rapid Transit Systems (新北市政府捷運工程局)
accessed 2026-08-18

The builder's full September 2021 technical article describes 161 kV supply entering the **K05** and **K09** utility rooms, transformation to 22.8 kV, distribution to the depot/**K02**/**K06**/**K07**/**K08** substations and rectification to 750 V DC for trains.

- 14 Ankeng LRT first-train and civil-work milestone [<https://www.dorts.ntpc.gov.tw/documentary/articleInfo/P9z2zp6WZrDp>]

安坑輕軌首列車登廠！

PRIMARY New Taipei City Department of Rapid Transit Systems (新北市市政府捷運工程局)
accessed 2026-08-18

The builder's full October 2021 milestone article records the first train entering the depot, the completed at-grade civil and track works, ongoing elevated track and electromechanical work, and the planned static, dynamic and endurance testing sequence.

- 15 Ankeng **K05** preliminary-inspection collision exercise [<https://www.dorts.ntpc.gov.tw/documentary/articleInfo/apVdMDJg2KRw?keyword=%E6%A8%A1%E6%93%AC%E6%BC%94%E7%B7%B4%E5%9C%A8%E6%BC%94%E4%BB%80%E9%BA%BC%EF%BC%9F&page=1>]

模擬演練在演什麼？

PRIMARY New Taipei City Department of Rapid Transit Systems (新北市市政府捷運工程局)
accessed 2026-08-18

The builder's full December 2022 preliminary-inspection article records a simulated motorcycle collision with a train near **K05** at the Anyi Road–Anzhong Road intersection and says emergency responders stood by without injury.

- 16 Ankeng LRT electromechanical contract and quality award [<https://www.dorts.ntpc.gov.tw/news/indexInfo/Pxe2kjWxmEgI?page=7>]

新北捷運安坑輕軌 榮獲公共工程金質獎優等殊榮

PRIMARY New Taipei City Department of Rapid Transit Systems (新北市市政府捷運工程局)
accessed 2026-08-18

The builder's full December 2023 award article identifies China Steel as the electromechanical turnkey contractor, China Engineering Consultants as project manager and Sinotech Engineering Consultants as supervision consultant, and records the project's Public Construction Golden Quality Award.

- 17 Ankeng **K08** floating trackbed record [<https://www.dorts.ntpc.gov.tw/documentary/video/BjeZYp3wdAwv?Page=6&type=149&vid=WQR2WeNvZGPV>]

減振神器！安坑輕軌浮動式道床

PRIMARY New Taipei City Department of Rapid Transit Systems (新北市市政府捷運工程局)
accessed 2026-08-18

The builder's full video-page article says the elevated section between Anhe Road Section 3 and Xinhe Elementary School **K08** has three floating-trackbed locations because it runs near homes, describes the measure as vibration reduction, and distinguishes grooved surface rail from I-shaped elevated rail.

- 18 Ankeng **K09** and An-Xin Bridge track-laying progress [<https://www.dorts.ntpc.gov.tw/documentary/video/MJjdJqXb2Av6?type=149&vid=xVR2eNL0dJ36>]

安坑輕軌高架段軌道及機廠進度

PRIMARY New Taipei City Department of Rapid Transit Systems (新北市市政府捷運工程局)
accessed 2026-08-18

The builder's full video-page article records track laying at **K09** and on An-Xin Bridge and explains that the bridge's diamond turnout was tackled first because its construction difficulty was high.

An independent, non-commercial reference site. Not affiliated with Taipei Rapid Transit Corporation, Taipei City Government, or any bus operator. Line colours are the official values published by each operator through Taiwan MOTC's open data platform. [About this site.](#)

Station names, codes and sequence from TDX Transport Data eXchange, Ministry of Transportation and Communications, operators TRTC, NTMC, and TYMC. Government open data. Retrieved 2026-08-10; source last updated 2020-01-31. The 12 Sanying station records absent from TDX are sourced directly to New Taipei Metro and government publications on their pages. Provenance.