


[← Back to the previous page](#)

Taoyuan Green Line

Taoyuan's under-construction green route from Bade through Taoyuan and Luzhu to the Airport MRT branches at **A11** and **A16**.

THE LINE

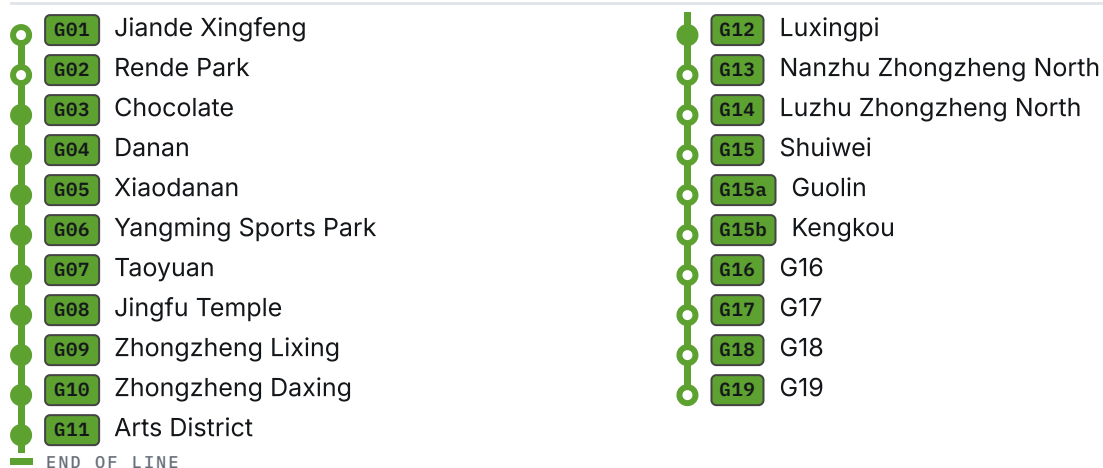

○ ELEVATED ● UNDERGROUND

G GREEN LINE 綠線			
LINE CODE G ^[1]	OPERATOR / BUILDER Taoyuan City Department of Rapid Transit Systems ^[1]	STATIONS 21 ^[1]	ROUTE LENGTH 27.8 ^[1]
STRUCTURE 10 underground / 11 elevated ^[1]	PROGRAMME PROGRESS 72.19% ^[2]	MAIN-LINE TARGET 2030 ^[1]	

Green Line in the current project record

The Taoyuan [\[/rail/thsr/stations/taoyuan/\]](/rail/thsr/stations/taoyuan/) engineering bureau describes the Green Line as a 27.8-kilometre, 21-station project with 10 underground and 11 elevated stations.^[1] Its route begins at **G01** in Bade, crosses Taoyuan and Luzhu, and divides toward Airport MRT **A11** and **A16**.^[1] The same page records an estimated cost of NT\$982.64 billion, central government support of NT\$397.44 billion and a 41.77% self-financing rate.^[1]

The station table names **G01**–**G15**, **G15a**, **G15b** and **G16**–**G19**. **G02** remains provisional because the road in front of the station has not yet been named, while **G16**–**G19** are still unnamed in the checked project record.^[1] This is why the content keeps those codes visible and does not manufacture English or Chinese station names for them.

Route and interchanges

The bureau's route description puts the eastern section through Bade's Jieshou Road corridor, Taoyuan's Jianguo and Yanping roads, the TRA Taoyuan station area, Zhongzheng Road and Luzhu's Zhongzheng North Road. The branch toward **G15a** and **G15b** reaches the Airport MRT at **A11**; the western Aviation City branch continues through **G16**–**G19** to Airport MRT **A16**.^[1] The project page identifies future connections with the underground TRA Taoyuan station, the Sanying Line [\[/rail/metro/lines/sanying-line/\]](/rail/metro/lines/sanying-line/) extension at **G04**, the Nankan transfer hub and Airport MRT **A11**/**A16**.^[1]

Construction approvals and progress

The feasibility study was approved by the Executive Yuan on 26 August 2011, the environmental assessment on 9 September 2014 and the comprehensive planning report on 20 April 2016.^[1] The bureau records the GM01 systems package award in 2018, GC01's elevated civil package in 2018, GC02 and GC03 underground packages in 2019, and the GC05 lifts-and-escalators package in 2022.^[1] It separately records GD04A detailed design and GC04B's later elevated civil package, with the package progress values dated to June 2026.^[1]

The current construction overview lists the Green Line as being in the construction stage at 72.19% overall progress.^[2] That programme figure is not silently substituted for any package figure: the line page records both the overview value and the bureau's individual GM01, GC01, GC02, GC03, GC05 and GC04B values as different measurements with different dates.^{[1] [2]}

Package progress, station renumbering and two extensions

A later engineering-bureau progress page, dated 31 July 2026, gives per-package figures more granular than the 72.19% overview: GC01 (the elevated package covering **G01**, **G02**, **G13**, **G14**, **G15**, **G15a** and **G15b**) at 94.57%; GC03 (underground, covering **G08**–**G12**) at 76.222%; GM01 (systems) at 56.801%; GC02 (underground, covering **G03**–**G06**) at 53.95%; GC05 (lifts and escalators) at 29.70%; and GC04B (the elevated Airport City branch package, covering **G14** to **G18**) at only 7.94%, reflecting its later award and a domestic construction-labour and materials shortage the bureau cites as the reason for a formal cross-agency "Integrity Platform" oversight mechanism set up around that package's procurement.^[5] Four stations were renumbered during design: today's **G14**, **G15**, **G15a** and **G15b** were previously coded **G13** a, **G14**, G31 and G32 respectively — a rename, not an error, worth noting since earlier news coverage still uses the old codes.^[5] In July 2026 the bureau ran a fully-automatic driverless demonstration from **G11** to **G15** using Siemens Trainguard-based signalling, with Siemens'

global transportation head attending; the engineering bureau head separately confirmed fire inspections passed at all priority-section stations and accessibility remediation completed at **G13**/**G14**/**G15**.^[5]

Two further extensions are in planning, not yet under construction. A roughly 7.2 km, five-station extension to Zhongli (中壢) — interchanging with TRA and the Airport MRT at G25 — cleared its environmental assessment in February 2023 and its comprehensive plan in December 2023, targeting a December 2031 opening; a depot contract for it was awarded in June 2026.^[6] A roughly 7.83 km, five-station, fully-elevated extension to Daxi (大溪) remains at the feasibility-study stage, with station positions explicitly not yet finalised.^[7]

Data boundary and future work

A live TDX probe on 24 August 2026 returned one TYMC `[/rail/operators/tymc/]` Line record for the Airport MRT and no Green Line record; the corresponding station, route, shape, transfer and first/last-timetable families likewise exposed the operating Airport MRT data rather than a G project dataset.^[4] The site therefore uses the DORTS project table as the Green Line station registry and leaves coordinates, geometry, ridership, fleet allocation, depot assignment, signalling, power, headways, fares, accessibility and opening dates TBC.

The engineering bureau's current Green Line page estimates main-line opening in 2030.^[1] That is a project target, not an operating timetable or a guarantee that every station will enter service on the same day. The approved planning-report record remains linked as the deeper source family for construction, finance and design questions that the concise project page does not resolve.^[3]

Source boundary

The primary record is intentionally layered: DORTS establishes the planned alignment, station table, approvals and progress; the construction overview supplies the programme-level percentage; the planning-report record points to the approved volumes; and TDX establishes the current absence of a Green Line operating dataset.^{[1] [2] [3] [4]}

Ridership

TBC. The checked operator source does not publish a line total for this code in the retrieved period range.

Source: Monthly station passenger traffic `[https://www.tymetro.com.tw/tymetro-new/upload/file/20260819_111103_doc_243.pdf]` · operator statistics index `[https://www.tymetro.com.tw/tymetro-new/tw/_pages/about/statistics.html]` · retrieved 2026-08-26

Specifications

Route length	27.8 km ^[1]
Stations	21 stations ^[1]
Underground stations	10 stations ^[1]
Elevated stations	11 stations ^[1]
Estimated cost	982.64 NT\$ billion ^[1]
Ridership	TBC

References

7 of 7 sources on this page are primary — published by the operator, the builder or government.

- 1** Taoyuan Metro Green Line project page [https://dorts.tycg.gov.tw/cp.aspx?Create=1&n=23132]
桃園市政府捷運工程局-捷運綠線

PRIMARY Taoyuan City Department of Rapid Transit Systems (桃園市政府捷運工程局)
accessed 2026-08-24

Current Green Line station table, locations, structure, transfer notes, route length, station count, budget, approvals, package milestones and target opening.
- 2** Taoyuan rail construction progress overview [https://dorts.tycg.gov.tw/cp.aspx?n=23173]
軌道建設進度總覽

PRIMARY Taoyuan City Department of Rapid Transit Systems (桃園市政府捷運工程局)
accessed 2026-08-24

Current programme-level progress record: Green Line construction stage and 72.19% total progress.
- 3** Green Line comprehensive planning report record [https://dorts.tycg.gov.tw/News_Content.aspx?n=23199&s=1582920]
桃園捷運綠線綜合規劃報告

PRIMARY Taoyuan City Department of Rapid Transit Systems (桃園市政府捷運工程局)
accessed 2026-08-24

Official record and links to the approved comprehensive planning report volumes.
- 4** Live TDX TYMC Green Line coverage check [https://tdx.transportdata.tw/api/basic/v2/Rail/Metro/Line/TYMC?\$format=JSON&\$top=1000&\$skip=0]
交通部運輸資料流通服務平臺 TYMC 綠線查核

PRIMARY Ministry of Transportation and Communications, TDX (交通部運輸資料流通服務平臺)
accessed 2026-08-24

Live probe retrieved on 2026-08-24: the TYMC Line endpoint returned one A record and no G record; the project registry therefore remains primary-research rather than TDX-backed.

5 Green Line construction progress [<https://dorts.tycg.gov.tw/cp.aspx?n=23174>]

工程進度：捷運綠線

PRIMARY Taoyuan City Department of Rapid Transit Systems (桃園市政府捷運工程局)

accessed 2026-08-29

Per-package progress figures dated 31 July 2026 (GC01/GC02/GC03/GC04B/GC05/GM01), the station-to-package mapping from the bureau's own per-station design pages, the **G13** a/ **G14** /G31/G32 to **G14** / **G15** / **G15a** / **G15b** renumbering, and a July 2026 driverless-demonstration news item on the same domain.

6 Green Line extension to Zhongli [<https://dorts.tycg.gov.tw/cp.aspx?n=23133>]

綠線延伸中壢

PRIMARY Taoyuan City Department of Rapid Transit Systems (桃園市政府捷運工程局)

accessed 2026-08-29

Route length, station count, EIA and comprehensive-plan approval dates, target opening and depot contract award date for the Zhongli extension.

7 Green Line extension to Daxi [<https://dorts.tycg.gov.tw/cp.aspx?n=24112>]

綠線延伸大溪

PRIMARY Taoyuan City Department of Rapid Transit Systems (桃園市政府捷運工程局)

accessed 2026-08-29

Route description and provisional GA01-GA05 station codes for the Daxi extension; the page itself states station positions are not yet finalised.

Last updated: 2026-08-29

An independent, non-commercial reference site. Not affiliated with any transit operator or government body in Taiwan. Line colours are the official values published by each operator through Taiwan MOTC's open data platform. [About this site.](#)

Station names, codes and sequence from TDX Transport Data eXchange, Ministry of Transportation and Communications, operators TRTC, NTMC, TYMC, and TMRT. Government open data. Retrieved 2026-08-24; source last updated 2016-11-23. The 12 Sanying station records absent from TDX are sourced directly to New Taipei Metro and government publications on their pages. Provenance.