



The Dahan River crossing, photographed in the line's opening week.


SINSYUAN [HTTPS://COMMONS.WIKIMEDIA.ORG/WIKI/FILE:SANYING_LINE_DAHAN_RIVER_BRIDGE_20260630.JPG] ·
CC BY-SA 4.0 [HTTPS://CREATIVECOMMONS.ORG/LICENSES/BY-SA/4.0] · WIKIMEDIA COMMONS

← [Back to the previous page](#)

Sanying Line

New Taipei's first self-built medium-capacity metro — a driverless elevated railway linking Dingpu, Sanxia and Yingge, opened on 30 June 2026.

THE LINE

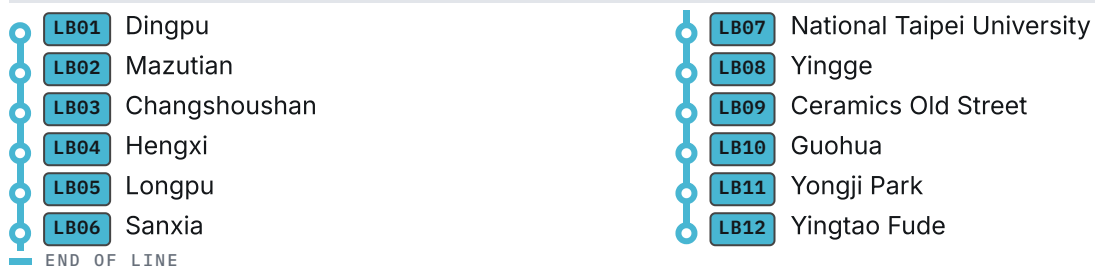

○ ELEVATED

OPERATOR New Taipei Metro Corporation [/rai l/operators/ntmc/]^[1]	BUILT BY New Taipei [/rail/ thsr/stations/taipei/] City Government^[6]	DISTRICTS Tucheng [/rail/met ro/stations/bl03/], Sanxia [/rail/metr o/stations/lb06/], Yingge [/rail/metr o/stations/lb08/]^[1]	OPENED 30 June 2026^[5]
FREE TRIAL UNTIL 31 August 2026^[1]	STATIONS 12^[5]	STRUCTURE Fully elevated^[7]	AUTOMATION GoA 4, unattended^[12]
INTERCHANGES Dingpu (Bannan Line [/rail/metro/l ines/bannan-line/]), Yingge (TRA)^[1]			

Overview

The Sanying Line is New Taipei [\[/rail/thsr/stations/taipei/\]](/rail/thsr/stations/taipei/)'s first metro of its own: the operator describes it as the city's first autonomously led medium-capacity system, rather than a line delivered for New Taipei by Taipei's DORTS.^[6] It opened on **30 June 2026** with 12 elevated stations over 14.29 km, linking the Bannan Line at Dingpu to Sanxia [\[/rail/metro/stations/lb06/\]](/rail/metro/stations/lb06/) and Yingge [\[/rail/metro/stations/lb08/\]](/rail/metro/stations/lb08/) and to the TRA main line at Yingge station.^[5]^[1]

That opening followed a feasibility approval on 3 September 2012, comprehensive- planning approval on 2 June 2015, advance works from October 2014, and main works from July 2016.^[5] The line completed stability testing on 7 April 2026, preliminary inspection on 26 April, the Ministry of Transportation's final inspection on 7 June and its operating permit on 23 June.^[5]^[2]

Route and alignment

From

LB01

 beside the Bannan Line [\[/rail/metro/lines/bannan-line/\]](/rail/metro/lines/bannan-line/)'s Dingpu terminus, the viaduct follows Zhongyang Road Section 4, crosses Freeway 3 and reaches Jieshou Road in Sanxia. It turns onto the Hengxi [\[/rail/metro/stations/lb04/\]](/rail/metro/stations/lb04/) riverside road and the new Longpu [\[/rail/metro/stations/lb05/\]](/rail/metro/stations/lb05/) Road approach to the Taipei University district, passing the National Academy for Educational Research before following Sanshu, Guoqing and Fuxing roads.^[5]

The alignment then climbs across Freeway 3 and the Dahan River into Yingge, follows the Yingge River, crosses Wenhua Road and the TRA main line, and bends north past Park No. 3. A second crossing of the main line brings it to Yingtao Road and the

LB12

 terminus at Fude 1st Road; tail tracks there preserve an interface for the Bade extension.^[5]

This is not a simple road-median railway. The city's early-works account lists crossings of Freeway 3, the TRA railway, the Dahan, Yingge, Sanxia and Hengxi waterways.^[7] The 2018 engineering report measured 13,452 m of bridge structures: 6,450 m of precast or cast-in-place prestressed U-girder, 2,052 m of prestressed box girder, 4,375 m of steel box girder and 575 m of special arch structures.^[12]

Planning and approvals

The project moved while its approved programme kept changing. The 2015 plan release said the National Development Council had completed its review, that basic design and project management were already proceeding in parallel, and that a construction access road beside Freeway 3 would let the viaduct works start promptly.^[9] The Executive Yuan approved the comprehensive plan that June; a first revised plan was not approved until October 2023, with an end-2025 completion target and project period through 2027.^[5]

The live builder record lists four submissions of a second revised plan between February 2025 and July 2026.^[5] It nevertheless records the railway opening in June 2026 while that revision remained under review — a useful distinction between the passenger railway being complete and the wider funded project, including land and close-out work, reaching its administrative end.

The rejected underground alternative

The elevated scheme was contested in Tucheng [\[/rail/metro/stations/bl03/\]](/rail/metro/stations/bl03/). At an August 2016 public meeting, residents opposed an elevated medium-capacity line on Zhongyang Road and asked for the underground, high-capacity Bannan Line to continue from Dingpu to [LB02](#), with Sanying beginning there.^[8] The road was planned as 30 m wide but some sections then provided only 18–20 m.^[8]

New Taipei DORTS said the underground station and crossover would still require demolition, place shield tunnels beneath houses, and meet a Dingpu station built without an extension interface.^[8] Taipei DORTS additionally identified operating disruption, land acquisition, demolition, poor financial performance and changes to an approved project; New Taipei therefore retained the elevated scheme.^[8] Those are the agencies' stated reasons, not an independent comparison of the alternatives.

Engineering and construction

Ground, foundations and tight curves

The basic alignment was shaped to limit land acquisition and demolition, which produced a **50 m minimum curve radius** and a **4.535% maximum gradient**.^[12] The engineering report describes Tucheng largely as the Dahan River's right-bank hills and alluvial plain, then a sequence of river terraces toward Yingge. Mountain sections expose sandstone and shale formations; the newer terraces and alluvium carry gravel, sand and silt over rock, with groundwater commonly 3.4–13.7 m below ground.^[12]

The designers preferred well foundations where ground and groundwater allowed, especially on 18–20 m roads where a smaller work area reduced traffic impact. ^[12] Pile foundations were retained for difficult dewatering or conflicts with major buried utilities. ^[12] The report's comparison put a typical well foundation at about 20 m² and 21 days against about 57 m² and 30 days for a pile-cap alternative; those are design comparisons, not whole-project averages. ^[12]

Bridges, BIM and the single design-build contract

For ordinary spans under 35 m the project made the prestressed U-girder its default. ^[12] Its low structural depth, continuous appearance and ability to carry a 90-degree curve were the stated reasons; the technical report expected roughly 800 m of U-girder erection work. ^[12] At the Sanxia River the metro bridge was planned parallel to two road bridges with a 6 m clear gap and a 180 m arch span. Across the Dahan River the report shows a 520 m crossing with a 100 m deep-channel zone and a flying-bird arch concept. ^[12]

The civil, water-and-environmental, railway systems and track works were procured together as one large design-build contract using a best-value award. ^[12] The report says 22 firms returned 502 comments in the first consultation, ten returned 235 in the second, and 17 returned 431 during public review before three teams ultimately tendered. ^[12] The city also combined a three-dimensional terrain model with BIM to simulate stations, bridges, construction space and later operations — its first such metro application in New Taipei. ^[7]

Stations and interchanges

All 12 passenger stations are elevated. ^[2] **LB01** connects with the Bannan Line at Dingpu, while **LB08** connects the metro with TRA Yingge station; the opening notice presents those two transfers as the route into the Taipei metro network and the conventional railway. ^[1]

The technical report's design-stage station programme used two standard forms. Road-median stations were about 58 m long and 21 m wide, while constrained sites used a side-platform form intended to reduce the bulk over the road. ^[12] It also required station entrances to include level-access or lift provision and parking for motorcycles and bicycles. ^[12]

Public art was planned as a line-wide system rather than a late collection of objects. By July 2026 the bureau described three themed trains — Hakka, New Taipei City Art Museum and Indigenous — alongside station works tied to local culture. ^[10] The Indigenous train uses Amis clothing and weaving motifs, an Amis 'alofo bag, and Atayal and Paiwan characters; the bureau says these trains are dispatched randomly rather than to a published timetable. ^[10]

Rolling stock

Hitachi Rail designed the steel-wheel, steel-rail trains and they were manufactured in Japan. ^[6] The fleet is **29 two-car trains**, not 29 cars. Each aluminium train is 35 m long, 2.6 m wide and 3.8 m high, carries 330 people — 50 seated and 280 standing — and uses electric and hydraulic braking. ^[6]

The operator publishes an **80 km/h maximum operating speed**, 750 V DC third- rail supply and communications-based train control. ^[6] The 2018 functional specification required CBTC, a system headway of 90 seconds or less and GoA 4 unattended operation, but specified a design maximum speed of at least 70 km/h. ^[12] Those figures describe different things: the earlier minimum performance requirement and the delivered fleet's maximum operating speed.

Operations

Opening service was advertised at roughly six-minute peak and eight-minute off- peak headways, with about 30 minutes end to end. ^[1] The free-trial period ran through 31 August 2026: stored-value-card users tapping in and out paid nothing. ^[1] Hours began at 10:00–20:00, expanded to 08:00–22:00 from 1 August and to 06:00–24:00 from 16 August. ^[3] ^[4]

The published normal fare band is NT\$20–35 by distance, but the operator says the actual charging date will be announced separately. ^[1] ^[4] Ending the free trial therefore does not, by itself, establish when fares began.

By 25 July the bureau counted more than **750,000 journeys**, an average of 53,000 on holidays, and 72,000 station exits on 4 July during the museum's fireworks and light show. ^[10] For that event it says trains ran at a 2.2-minute interval. ^[10] That demonstrated a special-event service, not the normal opening headway and not proof that the full line can sustain the 2018 design-stage 2.2-minute pattern in every operating condition.

Bade extension

The approved extension continues 4.03 km from **LB12** with three stations and a published budget of NT\$16.058 billion. ^[11] **LB12a** and **LB13** are planned elevated; the line then descends beneath the south side of Danan Forest Park to underground **LB14** , built together with Taoyuan Green Line [\[/rail/tymc/lines/green-line/\]](/rail/tymc/lines/green-line/) station **G04** . ^[11]

The builder records feasibility approval on 13 November 2019, environmental- assessment acceptance on 2 November 2023 and Executive Yuan approval of the comprehensive plan on **1 August 2025**. ^[11] Its header gives an expected completion in **2034**. ^[11] The same live page still labels the introductory alignment 「本計畫尚未核定」 — “the project remains unapproved.” ^[11] That sentence conflicts with the approval timeline on the page and is published here as stale official copy, not silently resolved.

Where the sources disagree

Project cost. Three official values survive. The October 2014 early-works release gave **NT\$55.022 billion**. ^[7] The April 2015 NDC-stage release and August 2018 engineering report gave **NT\$50.5 billion**; the report says value engineering used shorter trains, tighter headways,

shorter stations, well foundations and U-girders to reduce the earlier NT\$55 billion proposal.^[9]^[12] The live builder page now gives **NT\$50.200 billion**.^[5] These are dated project estimates or current programme figures, not interchangeable measurements of final expenditure.

Journey and peak interval. In 2014 the city forecast an end-to-end journey of no more than **23 minutes** and a **three-minute** peak interval.^[7] Opening service was about **30 minutes** and **six minutes**.^[1] The engineering report's mature design pattern put **LB01**–**LB08** at 2.2 minutes but **LB08**–**LB12** at 4.4 minutes.^[12] The sources describe an early forecast, initial operations and a design-year branching pattern respectively; none is substituted for another.


Bade approval. The extension page's dated record says the Executive Yuan approved the comprehensive plan on 1 August 2025, while its introduction says the project has not been approved.^[11] The page gives no update date for the stale sentence, so its provenance cannot be reconstructed.

See also: Public art in the Taipei-region rail network [\[/rail/history/public-art/\]](/rail/history/public-art/), Station naming and renames [\[/rail/history/station-naming/\]](/rail/history/station-naming/), and Metro incidents and service disruptions [\[/rail/history/incidents/\]](/rail/history/incidents/).

Ridership

The operator's published line total for 07/2026 is **1,921,382**. The table preserves the source's entry and exit dimensions where they are published. NTMC's older PDF records publish whole-system and line totals without station rows or separate entry and exit dimensions; the table leaves those cells TBC.

LATEST MONTH	PUBLISHED TOTAL	ENTRY / EXIT	
07/2026	1,921,382	1,921,502 / 1,921,382	

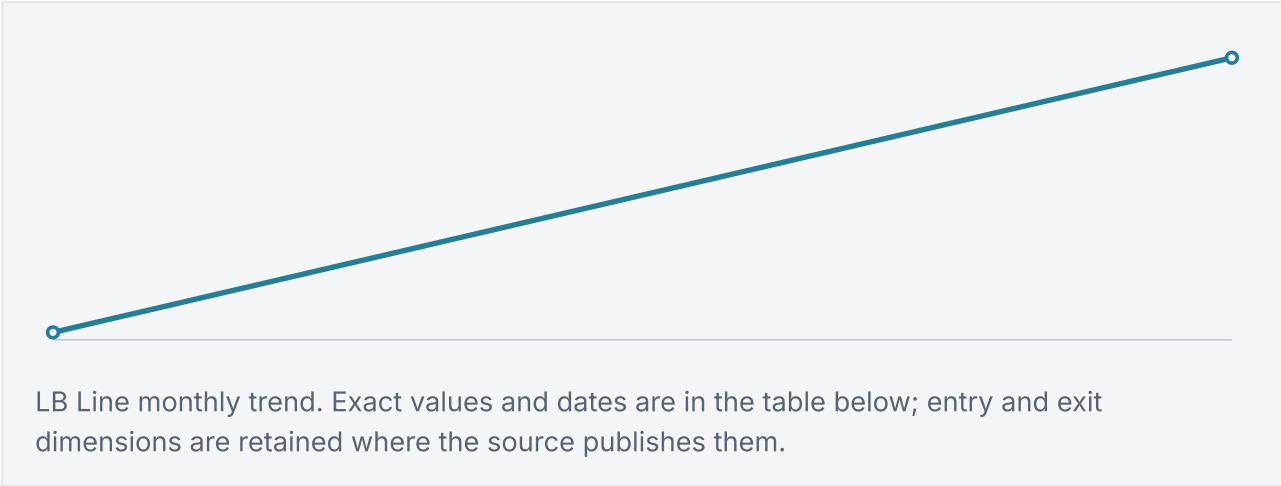

Published line ridership by month

MONTH	PUBLISHED TOTAL	ENTRY	EXIT	DAYS
-------	-----------------	-------	------	------

MONTH	PUBLISHED TOTAL	ENTRY	EXIT	DAYS
06/2026	50,906	53,372	50,906	30
07/2026	1,921,382	1,921,502	1,921,382	31

Source: Monthly whole-system passenger traffic reports [https://www.ntmetro.com.tw/basic/?mode=download&func=basic&code=basic10145&join=10145&path=MTE15bm0N(2Baci0WFq0ezu(2Be1semBi(2BmHj(2Be1seioiF8yNjA4MjQxMTE2Mjg(3D.ods)] · operator statistics index [https://www.ntmetro.com.tw/basic/?node=10145] · retrieved 2026-08-26

Specifications

Route length	14.29 km ^[5]
Stations	12 ^[5]
End-to-end journey, opening service	30 min ^[1]
Peak headway, opening service	6 min ^[1]
Off-peak headway, opening service	8 min ^[1]
Base fare	20 NT\$ ^[1]
Maximum fare	35 NT\$ ^[1]
Cars per train	2 ^[6]
Fleet size	29 trains ^[6]
Train capacity	330 people ^[6]
Maximum operating speed	80 km/h ^[6]
Power	V DC, 750 third rail ^[6]

References

12 of 12 sources on this page are primary — published by the operator, the builder or government.

1 The Sanying metro line officially opens 30 June [https://www.ntmetro.com.tw/basic/?mode=detail&node=867]
捷運三鶯線6/30正式通車
PRIMARY New Taipei Metro Corporation (新北大眾捷運股份有限公司) accessed 2026-08-06
archived [https://web.archive.org/web/20260806053328/https://www.ntmetro.com.tw/basic/?mode=detail&node=867]

The operator's opening notice: 全長14.29公里，全線共設有12座車站; transfers at Dingpu and Yingge; about 30 minutes end to end; six- and eight-minute initial headways; the 20–35 NT\$ fare band; and stored-value-card taps free through 31 August.

- 2 Ministry of Transportation to inspect the Sanying Line on 7 June 2026 [<https://www.motc.gov.tw/ch/app/data/view?id=14&module=news&serno=a7dd045e-24d7-4cfe-88e2-e390627cb279>]

交通部訂於115年6月7日辦理捷運三鶯線履勘

PRIMARY Ministry of Transportation and Communications (交通部) accessed 2026-08-14

The ministry's full inspection notice identifies 12 elevated stations — 共12座高架車站 — and records the statutory final inspection.

- 3 Sanying Line operating hours extended to 08:00–22:00 from 1 August [<https://www.ntpc.gov.tw/ch/home.jsp?dataserno=715da45564e1ee910042fd23ce8bcf0b&id=e8ca970cde5c00e1>]
赴市議會施政報告 侯友宜宣布三鶯線8/1起延長營運時間為「8時至22時」

PRIMARY New Taipei City Government (新北市政府) accessed 2026-08-14

Publishes the 08:00–22:00 trial-operation schedule effective from 1 August 2026.

- 4 Sanying Line fare and trial-operation notice [<https://www.ntmetro.com.tw/basic/?node=10166>]

三鶯線票價

PRIMARY New Taipei Metro Corporation (新北大眾捷運股份有限公司) accessed 2026-08-14

Announces 06:00–24:00 service for 16–31 August, repeats that stored-value-card taps are free during the trial, and says the charging date will be announced separately.

- 5 Sanying Line project record [<https://www.dorts.ntpc.gov.tw/about/route/1MJjdJr7dAv6>]
三鶯線

PRIMARY New Taipei City Government Department of Rapid Transit Systems (新北市政府捷運工程局) accessed 2026-08-23

The live builder record gives 14.29公里, 502.00億元, 12座, the 2012 feasibility and 2015 comprehensive-planning approvals, advance- and main-works dates, inspection and permit milestones, the full street-and-river alignment, tail tracks for Bade, and the 30 June 2026 opening.

- 6 Sanying Line electric multiple units [<https://www.ntmetro.com.tw/basic/?mode=detail&node=864>]

三鶯線電聯車

PRIMARY New Taipei Metro Corporation (新北大眾捷運股份有限公司) accessed 2026-08-23

The operator calls this New Taipei's first autonomously led medium-capacity system and publishes two-car unattended trains, Hitachi Rail design and Japanese manufacture, 29 trains, 35 × 2.6 × 3.8 m dimensions, 330-person capacity, 80 km/h operating speed, 750 V DC third rail and CBTC.

- 7 Work starts on the Fuxing Road–Long'en Street section of the Sanying Line [<https://www.ntpc.gov.tw/ch/home.jsp?dataserno=97560cd17a0812998e7100388c4f7a3d&id=e8ca970cde5c00e1>]

捷運三鶯線 復興路至隆恩街段工程開工

PRIMARY New Taipei City Government Transportation Department (新北市政府交通局)

accessed 2026-08-23

The 31 October 2014 announcement gives the early NT\$55.022bn estimate, 118,600 daily-trip forecast, all-elevated form, crossings of Freeway 3, TRA and five waterways, and New Taipei's first combination of a 3D terrain model with BIM for metro construction.

-
- 8** The Executive Yuan-approved elevated Sanying scheme is the most suitable option [https://www.ntpc.gov.tw/ch/home.jsp?dataserno=bff303d28030a2dd5daf2a0f641d7702&id=e8ca970cde5c00e1]
捷運三鶯線以行政院核定高架方式為最適方案
PRIMARY New Taipei City Government Department of Rapid Transit Systems (新北市政府捷運工程局)
accessed 2026-08-23
The bureau records resident opposition to the elevated medium-capacity plan and its evaluation of an underground Bannan high-capacity extension to **LB02**: demolition, tunnelling beneath houses, no extension interface at Dingpu, operating disruption, land and financial problems, extra cost and an indeterminate delay.
-
- 9** National Development Council passes the Sanying Line comprehensive plan [https://www.ntpc.gov.tw/ch/home.jsp?dataserno=42f3d489a109908ddf71d0e3978bbe5b&id=e8ca970cde5c00e1]
行政院國家發展委員會通過捷運三鶯線綜合規劃報告
PRIMARY New Taipei City Government Transportation Department (新北市政府交通局)
accessed 2026-08-23
The 20 April 2015 plan-stage release gives 14.29 km, 12 elevated stations, NT\$50.5bn, parallel basic design and project management, and a forecast reduction of 20–30 minutes in journeys to Taipei.
-
- 10** Sanying Line exceeds 750,000 riders in its first month; indigenous-themed train unveiled [https://www.ntpc.gov.tw/ch/home.jsp?dataserno=07031ea7bcea44638f451e7a0530a6a4&id=e8ca970cde5c00e1]
捷運三鶯線首月運量破75萬人次!美學再升級!「原住民主題彩繪列車」隨機發車掀追車熱潮
PRIMARY New Taipei City Government Department of Rapid Transit Systems (新北市政府捷運工程局)
accessed 2026-08-23
The bureau gives more than 750,000 journeys by 25 July, 53,000 on an average holiday, 72,000 exits on 4 July with 2.2-minute event headways, and explicitly says the themed trains 隨機發車.
-
- 11** Sanying Line extension to Bade, Taoyuan [https://www.dorts.ntpc.gov.tw/about/route/90V4drGQZqEN]
三鶯線延伸桃園八德段
PRIMARY New Taipei City Government Department of Rapid Transit Systems (新北市政府捷運工程局)
accessed 2026-08-23
The live page gives a 4.03 km, three-station, NT\$16.058bn extension expected in 2034, records Executive Yuan approval on 1 August 2025 and EIA acceptance on 2 November 2023, and describes two elevated stations followed by underground LB14 shared with Taoyuan Green Line **G04**. Its introduction still says 本計畫尚未核定, contradicting its own dated approval record.
-
- 12** Sanying Line construction project — implementation history and refinements [https://www.dorts.ntpc.gov.tw/admin/Content/Upload/file/20211117/0a63f435-a113-4405-88a0-6c95b39f797d.pdf]
捷運三鶯線建設計畫的推動歷程與精進作為

PRIMARY

New Taipei City Government Department of Rapid Transit Systems (新北市府捷運工程局),
工程 accessed 2026-08-23

The full 28-page August 2018 report was downloaded and read. It documents the alignment's geology, foundation selection, 13,452 m bridge-type schedule, special river crossings, U-girder design, GoA 4/CBTC functional requirements, depot planning, procurement and BIM construction methods; and says value engineering reduced a proposed NT\$55bn plan to NT\$50.5bn through short trains, close headways, shorter stations, well foundations and U-girders.

Last updated: 2026-08-23

An independent, non-commercial reference site. Not affiliated with any transit operator or government body in Taiwan. Line colours are the official values published by each operator through Taiwan MOTC's open data platform. [About this site](#).

Station names, codes and sequence from TDX Transport Data eXchange, Ministry of Transportation and Communications, operators TRTC, NTMC, TYMC, and TMRT. Government open data. Retrieved 2026-08-24; source last updated 2016-11-23. The 12 Sanying station records absent from TDX are sourced directly to New Taipei Metro and government publications on their pages. Provenance.