


[← Back to Lines](#)

Green Line

Taichung's 18-station driverless railway from Beitun Main Station to HSR Taichung Station.

THE LINE

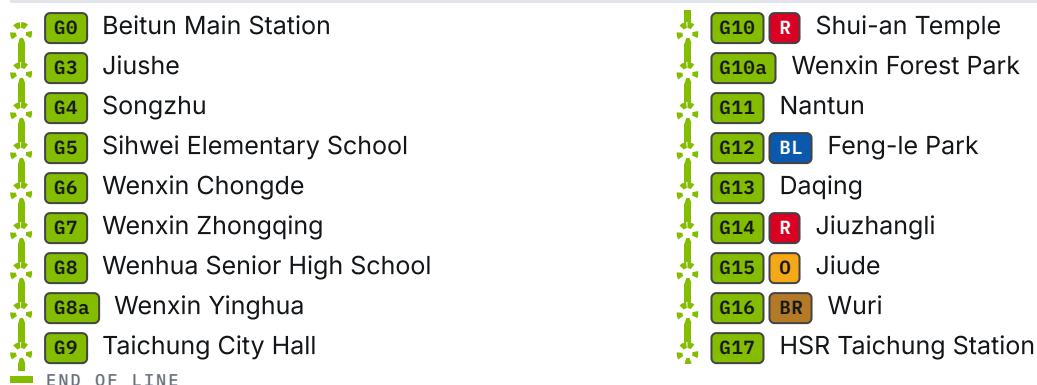

NOT ESTABLISHED

16.71^[3] km

OPERATOR-PUBLISHED ROUTE LENGTH

TDX publishes RouteLength 16.70 km, plus 16.93 km in direction 0 and 16.97 km in direction 1 as cumulative station chainage; these values are retained as a conflict rather than silently substituted for the operator's 16.71 km figure.

G WURIWENXIN BEITUN LINE 烏日文心北屯線

OPERATOR Taichung Metro Corporation [/rail/1/operators/tmrt/] [10]	STATIONS 18 [3]	TERMINI G0 Beitun Main Station [/rail/tmrt/stations/g0/] — G17 HSR Taichung Station [/rail/tmrt/stations/g17/] [2]	PUBLIC OPENING 25 April 2021 [12]
GUIDEWAY 16 elevated stations; G0 and G17 at ground level [4]	AUTOMATION Fully driverless [4]		

The Green Line is a single line, but it is not a single measurement. The operator's 2021 route report gives **16.71 km** and 18 stations. [3] The committed TDX route record gives **16.70 km** in its `RouteLength` field, while its station chainages reach **16.93 km** in direction 0 and **16.97 km** in direction 1. [1] Those four figures are published together here because the sources do not state that they measure exactly the same object; the page does not average them.

G0 Beitun Main Station [/rail/tmrt/stations/g0/] and **G17** HSR Taichung Station [/rail/tmrt/stations/g17/] are the line's two ground-level stations; the other 16 are elevated. [4] The operator describes the railway as steel-wheel and medium-capacity, with two-car, fully driverless trains and a maximum operating speed of 75 km/h. [4] The TDX sequence runs through Beitun, North District, Xitun, Nantun [/rail/tmrt/stations/g11/], South District and Wuri [/rail/tmrt/stations/g16/], ending beside the HSR and TRA interchange at **G17**. [1] [2]


The civil work is readable as three geographic packages: CJ910 at **G0** and the Beitun depot, CJ920 across **G3** – **G9**, and CJ930 from **G10** through **G17**. [5] [6] [7] CJ900/CJ907 is the system-equipment package, covering power, communications, automatic fare collection, depot equipment, trains and related systems rather than a further passenger-facing segment. [8]

The line's opening history contains a material safety event. A joint shaft fractured during test operation on 21 November 2020; the Control Yuan records failures to verify design parameters and deficiencies in quality supervision. [10] [11] Taichung [/rail/thsr/stations/taichung/] restarted test operation on 25 March 2021 and began formal service on 25 April 2021 after the remedial programme. [12] The sources read for this page do not support the often-repeated "2022 reopening" date, so it is recorded as a checked conflict rather than repeated as fact.

Public art is not treated as a colour swatch for the line. The operator's current roster names works at **G0**, **G3**, **G7**, **G9**, **G10a**, **G13**, **G16** and **G17**, with the station-specific pages below preserving those names and artists. [9]

Ridership

TBC. No ridership series has been imported for this operator. The page keeps the figure TBC rather than borrowing another operator's data.

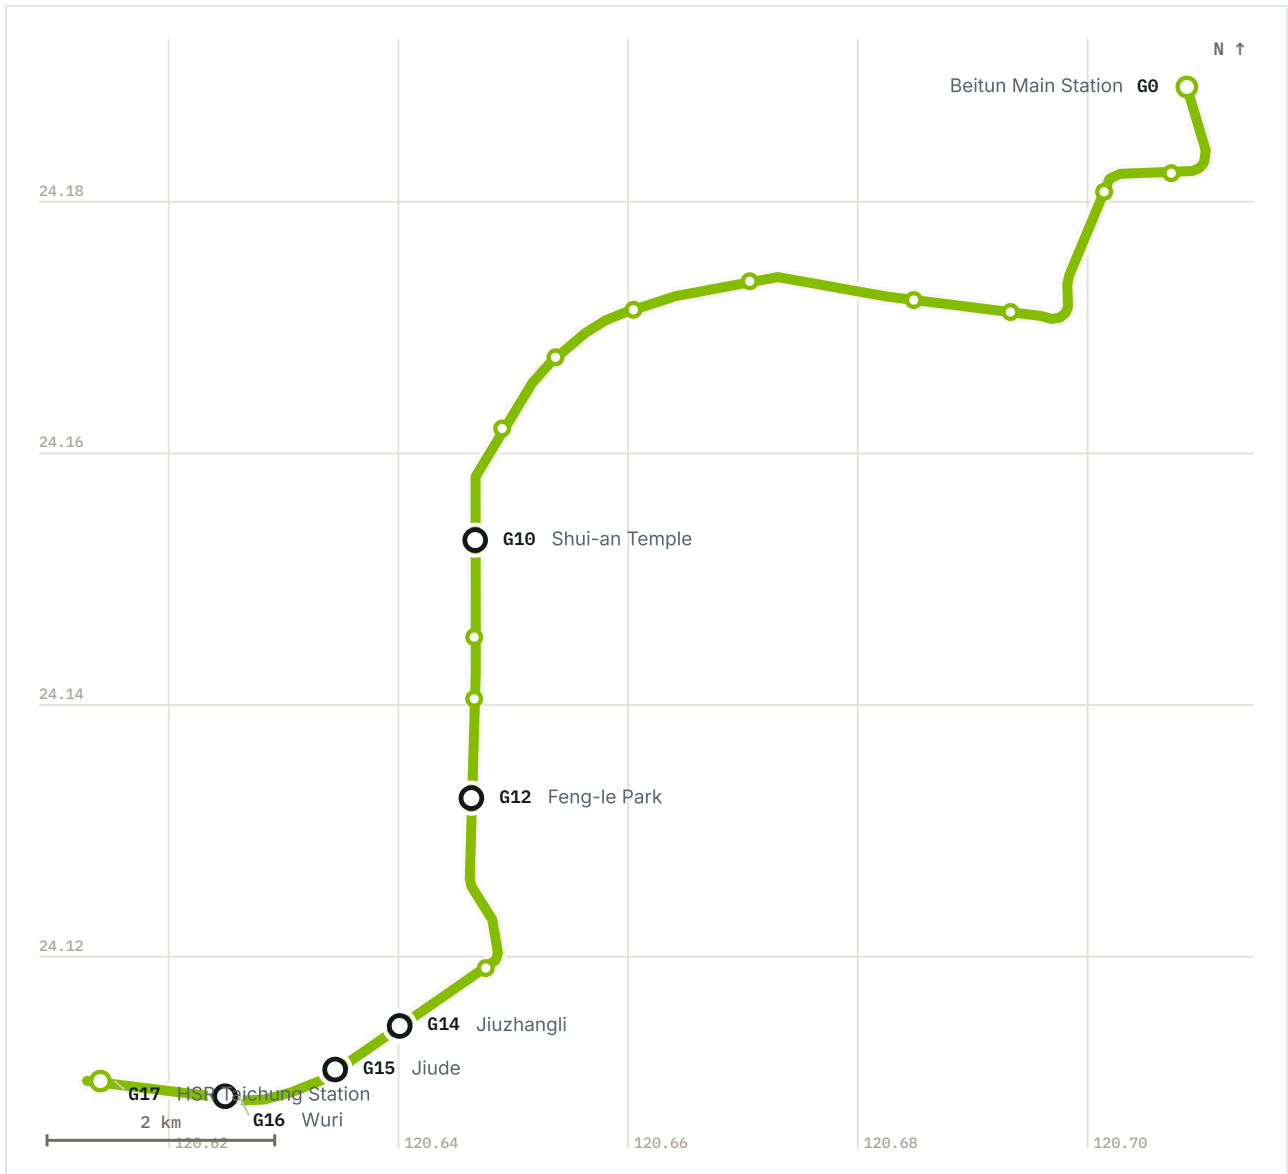

The line as surveyed, from MOTC route geometry — 16.9 km measured along the alignment from the first station to the last. Termini and interchanges are labelled; every station has a name on hover.

Specifications

Operator route length	16.71 km ^[3]
TDX direction 0 chainage	16.93 km ^[1]
TDX route length field	16.70 km ^[1]
TDX direction 1 chainage	16.97 km ^[1]
Stations	18 ^[3]
Train formation	2 cars ^[4]

References

12 of 12 sources on this page are primary — published by the operator, the builder or government.

- 1** Taiwan MOTC TDX rail records for TMRT [[https://tdx.transportdata.tw/api/basic/v2/Rail/Metro/StationOfRoute/TMRT?\\$format=JSON](https://tdx.transportdata.tw/api/basic/v2/Rail/Metro/StationOfRoute/TMRT?$format=JSON)]
交通部運輸資料流通服務標準資料
PRIMARY Ministry of Transportation and Communications, Taiwan (交通部) accessed 2026-08-22
Committed TDX StationOfRoute and Route records provide the 18-stop sequence and directional cumulative chainage; Shape provides the geometry.
- 2** Metro map [<https://www.tmrt.com.tw/metro-life/map>]
路線圖
PRIMARY Taichung Metro Corporation (臺中捷運股份有限公司) accessed 2026-08-23
Current operator map and station order from **G0** to **G17**.
- 3** Taichung Metro Corporation 2021 operational route report [<https://www.tmrt.com.tw/Content/Uploads/PublicClassArticle/9ad3a311-c8e4-4bb8-883a-d36d756eeae.pdf>]
臺中捷運股份有限公司營運路線資料
PRIMARY Taichung Metro Corporation (臺中捷運股份有限公司) accessed 2026-08-23
The operator's report gives the 16.71 km route, 18 stations, start/end and system description.
- 4** Frequently asked questions [<https://www.tmrt.com.tw/our-services/faq>]
常見問題
PRIMARY Taichung Metro Corporation (臺中捷運股份有限公司) accessed 2026-08-23
The operator's FAQ gives steel-wheel medium-capacity operation, two-car trains, 536 passengers per train, driverless operation, speeds and the two ground-level stations.
- 5** CJ910 project record [<https://tcrt.taichung.gov.tw/form/Details?Parser=2%2C6%2C45%2C%2C%2C%2C30>]
CJ910 工程
PRIMARY Taichung City Government Rapid Transit Systems Bureau (臺中市政府捷運工程局)

accessed 2026-08-23

Northern civil package: **G0**, Beitun depot and the track system.

- 6 CJ920 project record [<https://tcrt.taichung.gov.tw/form/Details?Parser=2%2C6%2C45%2C%2C%2C%2C29>]

CJ920 工程

PRIMARY Taichung City Government Rapid Transit Systems Bureau (臺中市政府捷運工程局)

accessed 2026-08-23

Civil package for the **G3**—**G9** elevated section.

- 7 CJ930 project record [<https://tcrt.taichung.gov.tw/form/Details?Parser=2%2C6%2C45%2C%2C%2C%2C28>]

CJ930 工程

PRIMARY Taichung City Government Rapid Transit Systems Bureau (臺中市政府捷運工程局)

accessed 2026-08-23

Civil package for **G10**—**G17**, including the ground-level HSR end.

- 8 CJ900/CJ907 system-equipment project record [<https://tcrt.taichung.gov.tw/form/Details?Parser=2%2C6%2C45%2C%2C%2C%2C31>]

CJ900、CJ907 機電系統工程

PRIMARY Taichung City Government Rapid Transit Systems Bureau (臺中市政府捷運工程局)

accessed 2026-08-23

System-equipment package from the depot to **G17**, jointly delivered by Kawasaki Heavy Industries, Alstom and CTCL.

- 9 Public works [<https://www.tmrta.com.tw/art/public-works>]

公共藝術

PRIMARY Taichung Metro Corporation (臺中捷運股份有限公司) accessed 2026-08-23

Current operator roster of Green Line public works and artists.

- 10 Major events [<https://www.tmrta.com.tw/about/major-events>]

大事紀

PRIMARY Taichung Metro Corporation (臺中捷運股份有限公司) accessed 2026-08-23

Company, construction-accident, joint-shaft and opening milestones.

- 11 Investigation into the Taichung Metro joint-shaft fracture [<https://cybsbox.cy.gov.tw/CYBSBoxSSL/edoc/download/71448>]

臺中捷運鋼箱梁斷裂案調查報告

PRIMARY Control Yuan, Taiwan (監察院) accessed 2026-08-23

Investigation of the design-check, quality-control and oversight failures in the 2020 test-operation fracture, and the subsequent remedial sequence.

- 12 Taichung Metro resumes test operation [<https://www.taichung.gov.tw/8868/8872/9962/1742706>]

臺中捷運恢復試營運

PRIMARY Taichung City Government (臺中市政府) accessed 2026-08-23

The city announcement records test-operation restart on 25 March 2021 and formal service on 25 April 2021.

Last updated: 2026-08-23

An independent, non-commercial reference site. Not affiliated with any transit operator or government body in Taiwan. Line colours are the official values published by each operator through Taiwan MOTC's open data platform. **About this site.**

Station names, codes and sequence from TDX Transport Data eXchange, Ministry of Transportation and Communications, operators TRTC, NTMC, TYMC, and TMRT. Government open data. Retrieved 2026-08-24; source last updated 2016-11-23. The 12 Sanying station records absent from TDX are sourced directly to New Taipei Metro and government publications on their pages. Provenance.